



POWER line



ARMOR line



ALING OG



 ALING-CONEL

- Stepen zaštite **IP 44**
- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

- Protection level **IP 44**
- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm

- Usaglašeno sa IEC 60884-1,
- Complied with IEC 60884-1,



251.00

251.1A

Sklopka jednopolna
10AX/250V~
*Single-pole switch
10AX/250V~*



2561.00

2561.1A

Taster sklopka za zvono
sa indikacijom 10A/250V~
*Bell push-button switch
with indication 10A/250V~*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



257.00

257.1A

Taster sklopka za roletne 10A/250V~
Rolling shutter push-button switch 10A/250V~

- Dve taster sklopke za direktno pokretanje elektromotora za podizanje i spuštanje roletni,
- Blokada koja sprečava istovremeno kretanje u oba smera
- Two push-button switches for direct activation of rolling shutters lifting and lowering electric motor
- Interlock of movement in both directions simultaneously



2411.00

2411.1A

Priključnica dvopolna
16A/250V~
sa polikarbonatskim jezgrom
*Double-pole socket outlet
16A/250V~
with polycarbonate insert*



252.00

252.1A

Sklopka serijska
10AX/250V~
*Serial switch
10AX/250V~*



2511.00

2511.1A

Sklopka jednopolna
sa indikacijom 10AX/250V~
*Single-pole switch
with indication 10AX/250V~*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



241.00

241.1A

Priključnica dvopolna
16A/250V~
sa porcelanskim jezgrom
*Double-pole socket outlet
16A/250V~
with porcelain insert*



2412P.00

2412.00

2412.1A

Priključnica dvostruka
dvopolna 16A/250V~
sa polikarbonatskim jezgrom
*Twofold double-pole socket
outlet 16A/250V~
with polycarbonate insert*

2412P.1A

PREMOŠTENJA / BRIDGED



253.00

253.1A

Sklopka naizmjenična
10AX/250V~
*Two-way switch
10AX/250V~*



2521.00

2521.1A

Sklopka serijska
sa indikacijom 10AX/250V~
*Serial switch
with indication 10AX/250V~*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



242.00

242.1A

Priključnica dvostruka
dvopolna 16A/250V~
sa porcelanskim jezgrom
*Twofold double-pole
socket outlet 16A/250V~
with porcelain insert*



243.00

243.1A

Priključnica trolpolna
16A/440V~
sa porcelanskim jezgrom
*Tripolar socket outlet
16A/440V~
with porcelain insert*



254.00

254.1A

Sklopka ukrсна
10AX/250V~
*Intermediate switch
10AX/250V~*



2531.00

2531.1A

Sklopka naizmjenična
sa indikacijom 10AX/250V~
*Two-way switch
with indication 10AX/250V~*

- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open



2451.00

2451.1A

Priključnica dvopolna
16A/250V~ Francuski standard
sa polikarbonatskim jezgrom
*Double-pole socket outlet
16A/250V~ French standard with
polycarbonate insert*

- Usaglašeno sa NF C 61-314
- Complied with NF C 61-314



2452.00

2452.1A

Priključnica dvostruka
dvopolna 16A/250V~
sa polikarbonatskim jezgrom
Francuski standard
*Twofold double-pole
socket outlet 16A/250V~
with polycarbonate insert
French standard*



255.00

255.1A

Taster sklopka za svetlo
10A/250V~
*Light push-button switch
10A/250V~*




2541.00

2541.1A

Sklopka jednopolna
sa indikacijom 10AX/250V~
*Single-pole switch
with indication 10AX/250V~*


- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open

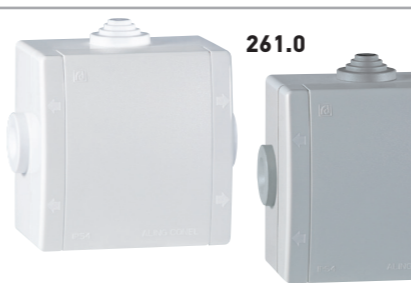

261.0

261.1

Kutija razvodna
sa 3 uvoda za na zid
80x80 500V **IP 54**
*Wall mounted junction box
with 3 cable glands
80x80 500V **IP 54***

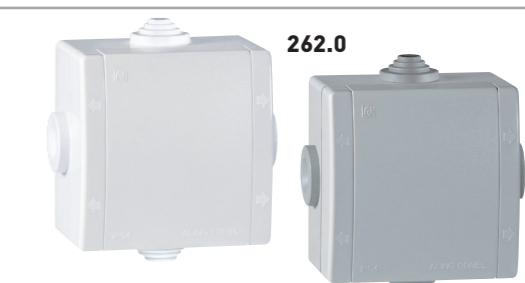

262.0

262.1

Kutija razvodna
sa 4 uvoda za na zid
80x80 500V **IP 54**
*Wall mounted junction box
with 4 cable glands
80x80 500V **IP 54***



2551.00

2551.1A

Taster sklopka za svetlo
sa indikacijom 10A/250V~
*Light push-button switch
with indication 10A/250V~*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off




259.00

259.1A

Sklopka jednopolna
sa indikacijom 16AX/250V~
*Single-pole switch
with indication 16AX/250V~*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off

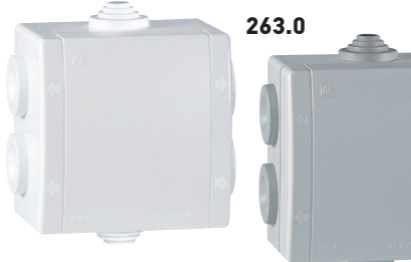

263.0

263.1

Kutija razvodna
sa 6 uvoda za na zid
80x80 500V **IP 54**
*Wall mounted junction box
with 6 cable glands
80x80 500V **IP 54***



2423.0

2423.1

Uvodnica dupla za vertikalno spajanje kutija
Double cable gland for vertical connection of boxes

- Za obezbeđenje potrebnog stepena zaštite na mestu spajanja dve kutije,
- Obezbeđuje tačan međusobni položaj kutija
- To provide the required level of protection at the connection point of two boxes
- Ensures the correct inter-position of boxes



256.00

256.xxx

Taster sklopka za zvono
10A/250V~
*Bell push-button switch
10A/250V~*




2591.00

2591.1A

Sklopka jednopolna
indikatorska 16AX/250V~
*Single-pole switch
with indicator 16AX/250V~*

- Indikacija svetli kada je sklopka uključena
- Indication is on when the switch is on

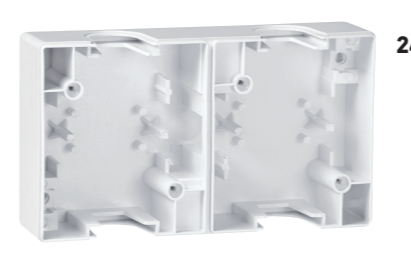

2422.0

2422.1

Kutija dvostruka za montažu sklopki i priključnica
Twofold box for installation of switches and sockets outlets

- Omogućeno unutrašnje prespajanje provodnika bez narušavanja stepena zaštite
- Internal over-splicing of conductors possible without interruption of protection level.

- Metalno kućište
- Stepen zaštite **IP 55 / IK07**
- Usaglašeno sa IEC 60669-1.
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

- Metal housing
- Protection level **IP 55 / IK07**
- Complied with IEC 60669-1.
- Wall mounting by screws dia. to 4 mm

- Stepen zaštite **IP 54 / IP 55**
- Usaglašeno sa IEC 60669-1, IEC 60884-1, IEC 60670-1
- Ugradnja na zid pomoću vijaka prečnika do 4,5 mm

- Protection level **IP 54 / IP 55**
- Complied with IEC 60669-1, IEC 60884-1, IEC 60670-1
- Wall mounting by screws dia. to 4,5 mm



281.1A
Sklopka jednopolna 10AX/250V~
Single-pole switch 10AX/250V~



2861.1A
Taster sklopka za zvono sa indikacijom 10A/250V~
Bell push-button switch with indication 10A/250V~

- Indikacija svjetli kada je sklopka isključena
- Indication is on when the switch is off



287.1A
Taster sklopka za roletne 10A/250V~
Rolling shutter push-button switch 10A/250V~

- Dve taster sklopke za direktno pokretanje elektromotora za podizanje i spužtanje roletni.
- Blokada koja sprečava istovremeno kretanje u oba smjera
- Two push-button switches for direct activation of rolling shutters lifting and lowering electric motor
- Interlock of movement in both directions simultaneously



210
Sklopka jednopolna 10AX/250V~
Single-pole switch 10AX/250V~

218
Sklopka ukrсна 10AX/250V~
Intermediate switch 10AX/250V~

214
Sklopka naizmjenična 10AX/250V~
Two-way switch 10AX/250V~

225
Sklopka jednopolna 16AX/250V~
Single-pole switch 16AX/250V~



212
Sklopka serijska 10AX/250V~
Serial switch 10AX/250V~



217
Taster sklopka za svjetlo 10A/250V~
Light push-button switch 10A/250V~

220
Taster sklopka za zvono 10A/250V~
Bell push-button switch 10A/250V~



282.1A
Sklopka serijska 10AX/250V~
Serial switch 10AX/250V~



2811.1A
Sklopka jednopolna sa indikacijom 10AX/250V~
Single-pole switch with indication 10AX/250V~

- Indikacija svjetli kada je sklopka isključena
- Indication is on when the switch is off



271.1A
Priključnica dvopolna 16A/250V~ sa porcelanskim jezgrom
Double-pole socket outlet 16A/250V~ with porcelain insert



201
Priključnica dvopolna 16A/250V~ sa porcelanskim jezgrom
Double-pole socket outlet 16A/250V~ with porcelain insert



203
Priključnica tropolna 16A/440V~ sa porcelanskim jezgrom
Tripolar socket outlet 16A/440V~ with porcelain insert



221
Kutija razvodna sa 4 uvoda za na zid 76x76 500V
Wall mounted junction box with 4 cable glands 76x76 500V

223
6 uvoda
6 cable glands



283.1A
Sklopka naizmjenična 10AX/250V~
Two-way switch 10AX/250V~



2821.1A
Sklopka serijska sa indikacijom 10AX/250V~
Serial switch with indication 10AX/250V~

- Indikacija svjetli kada je sklopka isključena
- Indication is on when the switch is off



2711.1A
Priključnica dvopolna 16A/250V~ sa polikarbonatskim jezgrom
Double-pole socket outlet 16A/250V~ with polycarbonate insert

PRIKLJUČNI PRIBOR CONNECTING ACCESSORIES

- Usaglašeno sa IEC 60884-1, IEC 61643-1.
- Priključni kabl PP/J-Y (H05VV-F) 3x1,5mm².
- Zaštitna od dodira kontakta

- Complied with IEC 60884-1, IEC 61643-1.
- Connection cord H05VV-F 3x1,5mm².
- Touch protection.


x = 0 Bela White

x = A Antracite Anthracite



443.x
Priključnica prenosna trostruka, bez kabl, sa dvopolnom indikatorskom sklopkom. max 3600W, 3x16A 250V~
Triple portable socket outlet, without cord, max 3600W, 3x16A 250V~

249 x 58 x 48 mm

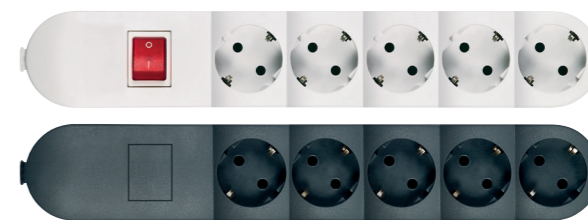

445.x
Priključnica prenosna petostruka, bez kabl, sa dvopolnom indikatorskom sklopkom. max 3600W, 5x16A 250V~
Fivefold portable socket outlet, without cord, max 3600W, 5x16A 250V~

339 x 58 x 48 mm



284.1A
Sklopka ukrсна 10AX/250V~
Intermediate switch 10AX/250V~



2831.1A
Sklopka naizmjenična sa indikacijom 10AX/250V~
Two-way switch with indication 10AX/250V~

- Indikacija svjetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open



2751.1A
Priključnica dvopolna 16A/250V~ sa polikarbonatskim jezgrom Francuski standard
Double-pole socket outlet 16A/250V~ with polycarbonate insert French standard

- Usaglašeno sa NF C 61-314
- Complied with NF C 61-314



4403.x
Priključnica prenosna trostruka, bez kabl, sa dvopolnom indikatorskom sklopkom. max 3600W, 3x16A 250V~
Triple portable socket outlet, without cord, with double-pole indication switch, max 3600W, 3x16A 250V~



4405.x
Priključnica prenosna petostruka, bez kabl, sa dvopolnom indikatorskom sklopkom. max 3600W, 5x16A 250V~
Fivefold portable socket outlet, without cord, with double-pole indication switch, max 3600W, 5x16A 250V~



285.1A
Taster sklopka za svjetlo 10A/250V~
Light push-button switch 10A/250V~



2841.1A
Sklopka ukrсна sa indikacijom 10AX/250V~
Intermediate switch with indication 10AX/250V~

- Indikacija svjetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open



273.1A
Priključnica tropolna 16A/440V~ sa porcelanskim jezgrom
Tripolar socket outlet 16A/440V~ with porcelain insert

| kabl dužine cord length | bez sklopke without switch | sa dvopolnom indikatorskom sklopkom with double-pole indication switch |
|----------------------------|-------------------------------|---|
| 1,5m | 4431.x | 44301.x |
| 3m | 4433.x | 44303.x |
| 5m | 4435.x | 44305.x |
| 10m | 4436.x | 44306.x |

| kabl dužine cord length | bez sklopke without switch | sa dvopolnom indikatorskom sklopkom with double-pole indication switch |
|----------------------------|-------------------------------|---|
| 1,5m | 4451.x | 44501.x |
| 3m | 4453.x | 44503.x |
| 5m | 4455.x | 44505.x |
| 10m | 4456.x | 44506.x |



2851.1A
Taster sklopka za svjetlo sa indikacijom 10A/250V~
Light push-button switch with indication 10A/250V~

- Indikacija svjetli kada je sklopka isključena
- Indication is on when the switch is off




289.1A
Sklopka jednopolna sa indikacijom 16AX/250V~
Single-pole switch with indication 16AX/250V~

- Indikacija svjetli kada je sklopka isključena
- Indication is on when the switch is off




292.1
Kutija razvodna sa 4 uvoda za na zid 80x70 500V
Wall mounted junction box with 4 cable glands 80x70 500V

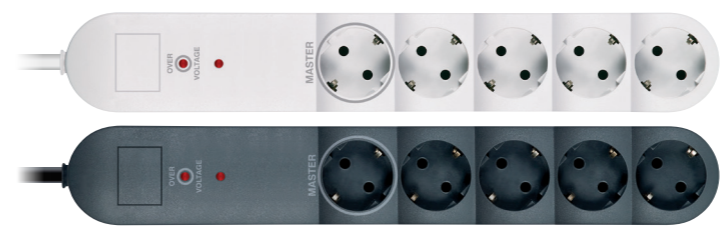

4461.x
Priključnica prenosna nerastavna petostruka, sa prenaponskom zaštitom, bez sklopke. max 3600W, 5x16A 250V~
Fivefold portable socket outlet unwireable, with surge protection, without switch, max 3600W, 5x16A 250V~

- sa prenaponskom zaštitom klase III, Up<1,5kV
- with surge protection class III, Up<1,5kV

- sa prenaponskom zaštitom klase III, Up<1,5kV i 1+4 MASTER-SLAVE (snaga uključena SLAVE priključnice min 15W)
- with surge protection class III, Up<1,5kV and 1+4 MASTER-SLAVE (switching threshold min 15W)

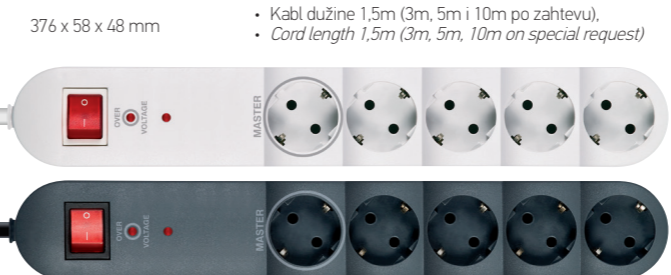

44601.x
Kabl dužine 1,5m (3m, 5m i 10m po zahtevu).
Cord length 1,5m (3m, 5m, 10m on special request)

sa dvopolnom indikatorskom sklopkom
with double-pole indication switch

- sa prenaponskom zaštitom klase III, Up<1,5kV
- with surge protection class III, Up<1,5kV

- sa prenaponskom zaštitom klase III, Up<1,5kV i RFI/EMI filterom
- with surge protection class III, Up<1,5kV, RFI/EMI filter



286.1A
Taster sklopka za zvono 10A/250V~
Bell push-button switch 10A/250V~



2891.1A
Sklopka jednopolna indikatorska 16AX/250V~
Single-pole switch with indicator 16AX/250V~

- Indikacija svjetli kada je sklopka uključena
- Indication is on when the switch is on



293.1
Kutija razvodna sa 6 uvoda za na zid 80x80 500V
Wall mounted junction box with 6 cable glands 80x80 500V

- sa prenaponskom zaštitom klase III, Up<1,5kV, RFI/EMI filterom i prenaponskim filterom za telefon/modem/fax liniju
- with surge protection class III, Up<1,5kV, RFI/EMI filter and surge filter for phone/modem/fax line

- sa prenaponskom zaštitom klase III, Up<1,5kV i 1+4 MASTER-SLAVE (snaga uključena SLAVE priključnice min 15W)
- with surge protection class III, Up<1,5kV and 1+4 MASTER-SLAVE (switching threshold min 15W)

PRIKLJUČNI PRIBOR
CONNECTING ACCESSORIES


- Usaglašeno sa IEC 60884-1,
- Mogućnost ugradnje kabla prečnika do 11 mm

- Complied with IEC 60884-1,
- The possibility of installing cable up to 11 mm

INSTALACIONI PRIBOR
INSTALLATION ACCESSORIES

301.0
Utikač dvopolni sa kontaktom za uzemljenje 16A/250V~
Double-pole plug with earthing contact 16A 250V~

301.13



302.0
Utikač dvopolni bez kontakta za uzemljenje 2,5A/250V~
EURO
Double-pole plug without earthing contact 2,5A 250V~ EURO

302.13



- Plojsnati kabl do 2 x 0,75 mm²
- Flat cable up to 2 x 0,75 mm

303.0
Utikač trolpolni sa kontaktom za uzemljenje L-izvedbe 16A/440V~
Tripolar plug with earthing contact L-type 16A 440V~


303.13



- Kabl prečnika do 13 mm
- Izrada od materijala otpornog na udar
- Cable up to 13 mm
- Made from stroke resistant material


9202.11
Kutija razvodna za na zid izrađena od ABS g/w 650°C 100 x 100 x 50 **IP 56** 500V
Wall mounted junction box made from ABS g/w 650°C 100 x 100 x 50 IP 56 500V

9212.11
izrađena od polikarbonata g/w 850°C made from polycarbonate g/w 850°C



9203.11
Kutija razvodna za na zid izrađena od ABS g/w 650°C 150 x 110 x 70 **IP 56** 500V
Wall mounted junction box made from ABS g/w 650°C 150 x 110 x 70 IP 56 500V


9213.11
izrađena od polikarbonata g/w 850°C made from polycarbonate g/w 850°C



- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 4 vijaka prečnika do 05 mm
- Complied with IEC 60670-1,
- Wall mounting by 4 screws dia. to 5 mm


307.0
Utikač dvopolni sa kontaktom za uzemljenje 16A/250V~
Double-pole plug with earthing contact 16A 250V~

307.13



320.T
• Transparentan
• Transparent

320.13
• Crni
• Black

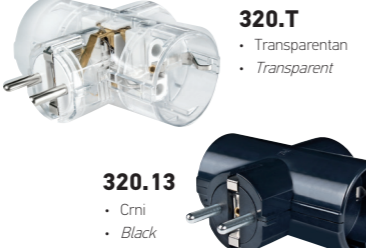

320.0
Utikač dvopolni kombinovan sa 3 priključnice sa kontaktom za uzemljenje (T-razvodnik) 16A 250V~
Double-pole plug combined with 3 sockets with earthing contact (T-adaptor) 16A 250V~

320.13



- Max opterećenje 3600W
- Max load 3600W

92021.11
Kutija razvodna za na zid sa 8 uvodnica Ø20 izrađena od ABS g/w 650°C 100 x 100 x 50 **IP 56** 500V
Wall mounted junction box with 8 cable glands Ø20 made from ABS g/w 650°C 100 x 100 x 50 IP 56 500V




92031.11
Kutija razvodna za na zid sa 10 uvodnica Ø20 izrađena od ABS g/w 650°C 150 x 110 x 70 **IP 56** 500V
Wall mounted junction box with 10 cable glands Ø20 made from ABS g/w 650°C 150 x 110 x 70 IP 56 500V



- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 4 vijaka prečnika do 05 mm
- Uvodnice za kablove Ø20 mm
- Complied with IEC 60670-1,
- Wall mounting by 4 screws dia. to 5 mm
- Cable bushings to Ø20 mm

308.0
Utikač dvopolni sa kontaktom za uzemljenje L-izvedbe 16A/250V~
Double-pole plug with earthing contact L-type 16A 250V~

308.13




4064.0
Set pribora za produžni kabl (406, prsten za vezivanje, 304) 16A 250V~ **CONEL**
Cord extension set (406, connecting ring, 304) 16A 250V~ CONEL

4064.13



- Prsten za vezivanje koji onemogućuje izvlačenje utikača
- Connecting ring for plug extraction disable

9212.1T
Kutija razvodna za na zid sa transparentnim poklopcem izrađena od polikarbonata g/w 850°C 100 x 100 x 50 **IP 56** 500V
Wall mounted junction box with transparent cover made from polycarbonate g/w 850°C 100 x 100 x 50 IP 56 500V



9213.1T
Kutija razvodna za na zid sa transparentnim poklopcem izrađena od polikarbonata g/w 850°C 150 x 110 x 70 **IP 56** 500V
Wall mounted junction box with transparent cover made from polycarbonate g/w 850°C 150 x 110 x 70 IP 56 500V



- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 4 vijaka prečnika do 05 mm
- Complied with IEC 60670-1,
- Wall mounting by 4 screws dia. to 5 mm

305.0
Utikač dvopolni masivni sa kontaktom za uzemljenje 16A/250V~ **MEDIUM**
Double-pole massive plug with earthing contact 16A 250V~ MEDIUM

305.13



- Izrada od materijala otpornog na nagnječenja,
- Made from contusion resistant material

4065.0
Set pribora za produžni kabl (406, prsten za vezivanje, 305) 16A 250V~ **MEDIUM**
Cord extension set (406, connecting ring, 305) 16A 250V~ MEDIUM


4065.13



- Prsten za vezivanje koji onemogućuje izvlačenje utikača
- Connecting ring for plug extraction disable

9204.11
Kutija razvodna za na zid izrađena od ABS g/w 650°C 150 x 110 x 120 **IP 56** 500V
Wall mounted junction box made from ABS g/w 650°C 150 x 110 x 120 IP 56 500V

9204.11



- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 4 vijaka prečnika do 05 mm
- Complied with IEC 60670-1,
- Wall mounting by 4 screws dia. to 5 mm

9201.11
Kutija razvodna za na zid sa 4 uvoda izrađena od ABS g/w 650°C Ø65 **IP 44** 500V
Wall mounted junction box with 4 cable glands made from ABS g/w 650°C Ø65 IP 44 500V


9211.11
izrađena od polikarbonata g/w 850°C made from polycarbonate g/w 850°C



- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 2 vijaka prečnika do 05 mm
- Uvodnice za kablove Ø20 mm
- Complied with IEC 60670-1,
- Wall mounting by 2 screws dia. to 5 mm
- Cable bushings to Ø20 mm

306.0
Utikač dvopolni masivni sa kontaktom za uzemljenje 16A/250V~ **STANDARD**
Double-pole massive plug with earthing contact 16A 250V~ STANDARD

306.13



- Izrada od materijala otpornog na nagnječenja,
- Made from contusion resistant material

4066.0
Set pribora za produžni kabl (406, prsten za vezivanje, 306) 16A 250V~ **STANDARD**
Cord extension set (406, connecting ring, 306) 16A 250V~ STANDARD


4066.13



- Prsten za vezivanje koji onemogućuje izvlačenje utikača
- Connecting ring for plug extraction disable

901
Adapter za ugradnju na zid 80x80
Adaptor for wall mounting 80x80


901



- Ugradnja na zid pomoću vijaka,
- Veza sa razvodnim kanalima,
- Mogućnost instalacije pomoću vijaka
- Wall mounted by screws,
- Cable ducts connection,
- Accessory installation by screws

931.0
Uvodnica kablovska PVC za kablove do Ø20 mm
Cable gland PVC for cables up to Ø20 mm


931.1



- Ugradnja u otvor Ø23 mm
- Mounting into the hole Ø23 mm

933.0
Uvodnica kablovska PVC za kablove do Ø14 mm
Cable gland PVC for cables up to Ø14 mm

933.1



- Ugradnja u otvor Ø20,5 mm
- Mounting into the hole Ø20,5 mm

932.0
Otvorena
Open

932.1



3004.13
• Gumena navlaka
• Rubber cover

304.13



304.0
Utikač dvopolni masivni sa kontaktom za uzemljenje 16A/250V~ **CONEL**
Double-pole massive plug with earthing contact 16A 250V~ CONEL

304.0




- Izrada od materijala otpornog na nagnječenja
- Made from contusion resistant material

4006.13
• Gumena navlaka
• Rubber cover

406.0
Priključnica prenosna dvopolna sa kontaktom za uzemljenje kuplung 16A/250V~
Double-pole portable socket outlet with earthing contact 16A 250V~

406.13



- Izrada od materijala otpornog na nagnječenja
- Made from contusion resistant material

700
Kutija montažna Ø60x40 nizajuća za rastojanje 71mm
Mounting box Ø60x40 for sequencing with 71mm step


710
Ø60x60



- Usaglašeno sa IEC 60670-1,
- Ugradnja u zid,
- Mogućnost instalacije pomoću stegača ili vijaka

800
Kutija montažna Ø60x40 nizajuća za rastojanje 80mm
Mounting box Ø60x40 for sequencing with 80mm step

800



- Complied with IEC 60670-1,
- Flush mounted,
- Accessory installation by clamps or screws

804
Kutija montažna Ø70 za trolpolne priključnice
Mounting box Ø70 for three pole sockets

804



216.0
Sklopka jednopolna preglbna međugajtanska 16A 250V~
Single-pole intercord rocker switch 16A 250V~

216.13




- Usaglašeno sa IEC 60669-1,
- Mogućnost ugradnje kabla prečnika do 7 mm
- Complied with IEC 60669-1,
- The possibility of installing cable up to 7 mm

Priključnica dvopolna **IP 54** 16A/250V~
Double-pole socket outlet IP 54 16A

231.00

231.11


231.44

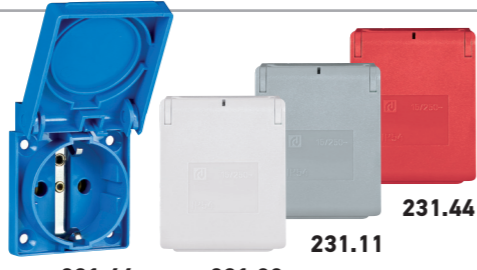

- Ugradnja na panel pomoću vijaka
- Panel mounting by screws

900
Kutija razvodna 100x100 poklopac sa vijkom 500V~
Junction box 100x100 with screw cover 500V~

900



- Usaglašeno sa IEC 60670-1,
- Ugradnja u zid
- Complied with IEC 60670-1,
- Flush mounted

910.0
Zaštitna maska za zid 140x180
Wall protection cover 140x180

910.0




- Ugradnja ispod maske
- Under cover frame mounting

PP910.0
Pakovanje 5 kom.
Pack of 5 pcs.

910.T
• Transparentna
• Transparent

PP910.T
Pakovanje 5 kom.
Pack of 5 pcs.



TERMOPLASTIČNA SIJALIČNA GRLA THERMOPLASTIC LAMP HOLDERS

x = 0

Bela
White

x = A

Crna
Black

■ Temperaturna otpornost
Temperature resistance



11011.x ■ T180
11012.x ■ T210
Grlo E14 viseće
Lamp holder E14 hanging
• Navoj za nazuvicu M10x1
• Threaded M10x1



12011.x ■ T180
12012.x ■ T210
Grlo E27 viseće
Lamp holder E27 hanging
• Navoj za nazuvicu M10x1
• Threaded M10x1



11021.x ■ T180
11022.x ■ T210
Grlo E14 luster
Lamp holder E14 chandelier
• Navoj za nazuvicu M10x1
• Threaded M10x1



12021.x ■ T180
12022.x ■ T210
Grlo E27 luster
Lamp holder E27 chandelier
• Navoj za nazuvicu M10x1
• Threaded M10x1



11023.x ■ T180
11024.x ■ T210
Grlo E14 luster sa obodom
Lamp holder E14 chandelier with flange
• Navoj za nazuvicu M10x1
• Threaded M10x1



12023.x ■ T180
12024.x ■ T210
Grlo E27 luster sa obodom
Lamp holder E27 chandelier with flange
• Navoj za nazuvicu M10x1
• Threaded M10x1



11031.x ■ T180
11032.x ■ T210
Grlo E14 luster kratko
Lamp holder E14 chandelier short
• Navoj za nazuvicu M10x1
• Threaded M10x1



12031.x ■ T180
12032.x ■ T210
Grlo E27 luster kratko
Lamp holder E27 chandelier short
• Navoj za nazuvicu M10x1
• Threaded M10x1



11041.x ■ T180
11042.x ■ T210
Grlo E14 stojeće za vijak
Lamp holder E14 standing for screw
• Za vezu sa vijkom
• Connection with screw



12041.x ■ T180
12042.x ■ T210
Grlo E27 stojeće za vijak
Lamp holder E27 standing for screw
• Za vezu sa vijkom
• Connection with screw



11043.x ■ T180
11044.x ■ T210
Grlo E14 stojeće za utiskivanje
Lamp holder E14 standing for indentation
• Za vezu utiskivanjem
• Connection with indentation



12043.x ■ T180
12044.x ■ T210
Grlo E27 stojeće za utiskivanje
Lamp holder E27 standing for indentation
• Za vezu utiskivanjem
• Connection with indentation



12013.x ■ T180
12014.x ■ T210
Grlo E27 zidno - ravno
Lamp holder E27 for wall - flat
• Za vezu sa vijkom
• Connection with screw



12015.x ■ T180
12016.x ■ T210
Grlo E27 zidno - ravno
Lamp holder E27 for wall - flat
• Za vezu sa vijkom
• Connection with screw

KERAMIČKA SIJALIČNA GRLA / CERAMIC LAMP HOLDERS



1300
Grlo E27 stojeće
Lamp holder E27 standing
• sa metalnim nosačem
• with metal bracket



1330
Grlo E27 viseće
Lamp holder E27 hanging
• Navoj za nazuvicu M10x1
• Threaded M10x1