



***POWER line***



**ARMOR line**



**ALING OG**



**ALING-CONEL**

- Stepen zaštite **IP44**
- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

- Protection level **IP 44**
- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm

- Usaglašeno sa IEC 60884-1,
- Complied with IEC 60884-1,



**251.00**

**251.1A**

Sklopka jednopolna  
10AX/250V- **IP44**  
*Single-pole switch  
10AX/250V- IP44*



**2561.00**

**2561.1A**

Taster sklopka za zvono  
sa indikacijom 10A/250V- **IP44**  
*Bell push-button switch with  
indication 10A/250V- IP44*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



**257.00**

**257.1A**

Taster sklopka za roletne 10A/250V-**IP44**  
*Rolling shutter push-button switch  
10A/250V- IP44*

- Dve taster sklopke za direktno pokretanje elektromotora za podizanje i spuštanje roletni,
- Blokada koja sprečava istovremeno kretanje u oba smera
- Two push-button switches for direct activation of rolling shutters lifting and lowering electric motor
- Interlock of movement in both directions simultaneously



**2411.00**

**2411.1A**

Priključnica dvopolna  
16A/250V- **IP44** sa  
polikarbonatskim jezgrom  
*Double-pole socket outlet  
16A/250V- IP44 with  
polycarbonate insert*



**252.00**

**252.1A**

Sklopka serijska  
10AX/250V- **IP44**  
*Serial switch  
10AX/250V- IP44*



**2511.00**

**2511.1A**

Sklopka jednopolna  
sa indikacijom 10AX/250V- **IP44**  
*Single-pole switch with  
indication 10AX/250V- IP44*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



**241.00**

**241.1A**

Priključnica dvopolna  
16A/250V- **IP44** sa  
porcelanskim jezgrom  
*Double-pole socket outlet  
16A/250V- IP44  
with porcelain insert*



**2412P.00**

**2412.00**

**2412.1A**

Priključnica dvostruka  
dvopolna 16A/250V- **IP44** sa  
polikarbonatskim jezgrom  
*Twofold double-pole socket  
outlet 16A/250V- IP44 with  
polycarbonate insert*

**2412P.1A**

PREMOŠTENJA / BRIDGED



**253.00**

**253.1A**

Sklopka naizmjenična  
10AX/250V- **IP44**  
*Two-way switch  
10AX/250V- IP44*



**2521.00**

**2521.1A**

Sklopka serijska  
sa indikacijom 10AX/250V- **IP44**  
*Serial switch  
with indication 10AX/250V- IP44*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



**242.00**

**242.1A**

Priključnica dvostruka  
dvopolna 16A/250V- **IP44**  
sa porcelanskim jezgrom  
*Twofold double-pole  
socket outlet 16A/250V-  
IP44 with porcelain insert*



**243.00**

**243.1A**

Priključnica trolpolna  
16A/440V- **IP44**  
sa porcelanskim jezgrom  
*Tripolar socket outlet  
16A/440V- IP44  
with porcelain insert*



**254.00**

**254.1A**

Sklopka ukrсна  
10AX/250V- **IP44**  
*Intermediate switch  
10AX/250V- IP44*



**2531.00**

**2531.1A**

Sklopka naizmjenična  
sa indikacijom 10AX/250V- **IP44**  
*Two-way switch with indication  
10AX/250V- IP44*

- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open



**2451.00**

**2451.1A**

Priključnica dvopolna 16A/250V-  
**IP44** sa polikarbonatskim jezgrom  
Francuski standard  
*Double-pole socket outlet 16A/250V-  
IP44 with polycarbonate insert  
French standard*

- Usaglašeno sa NF C 61-314
- Complied with NF C 61-314



**2452.00**

**2452.1A**

Priključnica dvostruka  
dvopolna 16A/250V- **IP44**  
sa polikarbonatskim jezgrom  
Francuski standard  
*Twofold double-pole socket  
outlet 16A/250V- IP44  
with polycarbonate insert  
French standard*



**255.00**

**255.1A**

Taster sklopka za svetlo  
10A/250V- **IP44**  
*Light push-button switch  
10A/250V- IP44*



**2541.00**

**2541.1A**

Sklopka jednopolna sa  
indikacijom 10AX/250V- **IP44**  
*Single-pole switch with  
indication 10AX/250V- IP44*


- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open



**261.0**

**261.1**

Kutija razvodna  
sa 3 ulova za na zid  
80x80 500V **IP54**  
*Wall mounted junction box  
with 3 cable glands  
80x80 500V IP54*

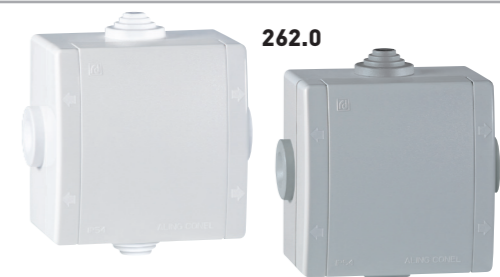

**262.0**

**262.1**

Kutija razvodna  
sa 4 ulova za na zid  
80x80 500V **IP54**  
*Wall mounted junction box  
with 4 cable glands  
80x80 500V IP54*



**2551.00**

**2551.1A**

Taster sklopka za svetlo  
sa indikacijom 10A/250V- **IP44**  
*Light push-button switch  
with indication 10A/250V- IP44*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off




**259.00**

**259.1A**

Sklopka jednopolna  
sa indikacijom 16AX/250V- **IP44**  
*Single-pole switch  
with indication 16AX/250V- IP44*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off

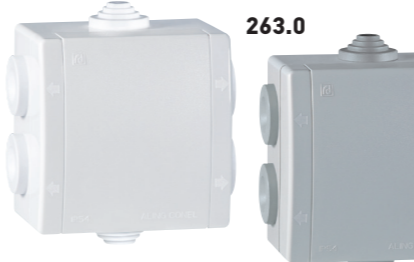

**263.0**

**263.1**

Kutija razvodna  
sa 6 ulova za na zid  
80x80 500V **IP54**  
*Wall mounted junction box  
with 6 cable glands  
80x80 500V IP54*



**2423.0**

**2423.1**

Uvodnica dupla za vertikalno spajanje kutija  
*Double cable gland for vertical connection of boxes*

- Za obezbeđenje potrebnog stepena zaštite na mestu spajanja dve kutije,
- Obezbeđuje tačan međusobni položaj kutija
- To provide the required level of protection at the connection point of two boxes
- Ensures the correct inter-position of boxes



**256.00**

**256.xxx**

Taster sklopka za zvono  
10A/250V- **IP44**  
*Bell push-button switch  
10A/250V- IP44*




**2591.00**

**2591.1A**

Sklopka jednopolna  
indikatorska 16AX/250V- **IP44**  
*Single-pole switch  
with indicator 16AX/250V- IP44*

- Indikacija svetli kada je sklopka uključena
- Indication is on when the switch is on

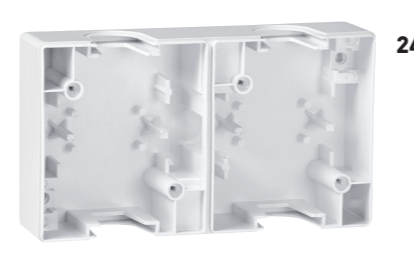

**2422.0**

**2422.1**

Kutija dvostruka za montažu sklopki i priključnica  
*Twofold box for installation of switches and sockets outlets*

- Omogućeno unutrašnje prespajanje provodnika bez narušavanja stepena zaštite
- Internal over-splicing of conductors possible without interruption of protection level.

- Metalno kućište
- Stepen zaštite **IP 55 / IK08**
- Usaglašeno sa IEC 60669-1.
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

- Metal housing
- Protection level **IP 55 / IK08**
- Complied with IEC 60669-1.
- Wall mounting by screws dia. to 4 mm

- Stepen zaštite **IP 54 / IP 55**
- Usaglašeno sa IEC 60669-1, IEC 60884-1, IEC 60670-1
- Ugradnja na zid pomoću vijaka prečnika do 4,5 mm

- Protection level **IP 54 / IP 55**
- Complied with IEC 60669-1, IEC 60884-1, IEC 60670-1
- Wall mounting by screws dia. to 4,5 mm



**281.1A**  
Sklopka jednopolna  
10AX/250V- **IP55/IK08**  
*Single-pole switch  
10AX/250V- IP55/IK08*



**2861.1A**  
Taster sklopka za zvono  
sa indikacijom 10A/250V- **IP55/IK08**  
*Bell push-button switch  
with indication 10A/250V- IP55/IK08*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



**287.1A**  
Taster sklopka za roletne 10A/250V-  
**IP55/IK08**  
*Rolling shutter push-button switch  
10A/250V-IP55/IK08*

- Dve taster sklopke za direktno pokretanje elektromotora za podizanje i spuštanje roletni.
- Blokada koja sprečava istovremeno kretanje u oba smera
- Two push-button switches for direct activation of rolling shutters lifting and lowering electric motor
- Interlock of movement in both directions simultaneously



**282.1A**  
Sklopka serijska  
10AX/250V- **IP55/IK08**  
*Serial switch  
10AX/250V- IP55/IK08*



**2811.1A**  
Sklopka jednopolna sa indikacijom  
10AX/250V- **IP55/IK08**  
*Single-pole switch with indication  
10AX/250V- IP55/IK08*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



**271.1A**  
Priključnica dvopolna  
16A/250V- **IP55/IK08**  
sa porcelanskim jezgrom  
*Double-pole socket outlet  
16A/250V- IP55/IK08  
with porcelain insert*



**210**  
Sklopka jednopolna  
10AX/250V- **IP55**  
*Single-pole switch  
10AX/250V- IP55*

**218**  
Sklopka ukrсна  
10AX/250V- **IP55**  
*Intermediate switch  
10AX/250V- IP55*

**214**  
Sklopka naizmenična  
10AX/250V- **IP55**  
*Two-way switch  
10AX/250V- IP55*

**225**  
Sklopka jednopolna  
16AX/250V- **IP55**  
*Single-pole switch  
16AX/250V- IP55*



**212**  
Sklopka serijska  
10AX/250V-**IP55**  
*Serial switch  
10AX/250V- IP55*



**217**  
Taster sklopka za svetlo 10A/250V-  
*Light push-button switch 10A/250V-*

**220**  
Taster sklopka za zvono  
10A/250V-  
*Bell push-button switch  
10A/250V-*



**221**  
Kutija razvodna sa 4 ulova  
za na zid 76x76 500V **IP55**  
*Wall mounted junction box with  
4 cable glands 76x76 500V IP55*

**223**      **2211**  
6 ulova      bez ulova  
*6 cable glands      without glands*



**283.1A**  
Sklopka naizmenična  
10AX/250V- **IP55/IK08**  
*Two-way switch  
10AX/250V- IP55/IK08*



**2821.1A**  
Sklopka serijska sa indikacijom  
10AX/250V- **IP55/IK08**  
*Serial switch with indication  
10AX/250V- IP55/IK08*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



**2711.1A**  
Priključnica dvopolna  
16A/250V- **IP55/IK08**  
sa polikarbonatskim jezgrom  
*Double-pole socket outlet  
16A/250V- IP55/IK08  
with polycarbonate insert*



**284.1A**  
Sklopka ukrсна  
10AX/250V- **IP55/IK08**  
*Intermediate switch  
10AX/250V- IP55/IK08*



**2831.1A**  
Sklopka naizmenična sa indikacijom  
10AX/250V- **IP55/IK08**  
*Two-way switch with indication  
10AX/250V- IP55/IK08*

- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open



**2751.1A**  
Priključnica dvopolna 16A/250V-  
**IP55/IK08** sa polikarbonatskim  
jezgrom Francuski standard  
*Double-pole socket outlet  
16A/250V- IP55/IK08  
with polycarbonate insert  
French standard*

- Usaglašeno sa NF C 61-314
- Complied with NF C 61-314



**285.1A**  
Taster sklopka za svetlo  
10A/250V- **IP55/IK08**  
*Light push-button switch  
10A/250V- IP55/IK08*



**2841.1A**  
Sklopka ukrсна  
sa indikacijom 10AX/250V-  
**IP55/IK08**  
*Intermediate switch  
with indication 10AX/250V-  
IP55/IK08*

- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open



**273.1A**  
Priključnica tropolna  
16A/440V- **IP55/IK08**  
sa porcelanskim jezgrom  
*Tripolar socket outlet  
16A/440V- IP55/IK08  
with porcelain insert*



**2851.1A**  
Taster sklopka za svetlo  
sa indikacijom 10A/250V-  
**IP55/IK08**  
*Light push-button switch  
with indication 10A/250V-  
IP55/IK08*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



**289.1A**  
Sklopka jednopolna  
sa indikacijom 16AX/250V-  
**IP55/IK08**  
*Single-pole switch  
with indication 16AX/250V-  
IP55/IK08*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



**292.1**  
Kutija razvodna  
sa 4 ulova za na zid  
80x70 500V **IP55**  
*Wall mounted junction box  
with 4 cable glands  
80x70 500V IP55*



**286.1A**  
Taster sklopka za zvono  
10A/250V- **IP55/IK08**  
*Bell push-button switch  
10A/250V- IP55/IK08*



**2891.1A**  
Sklopka jednopolna  
indikatorska 16AX/250V-  
**IP55/IK08**  
*Single-pole switch  
with indicator 16AX/250V-  
IP55/IK08*

- Indikacija svetli kada je sklopka uključena
- Indication is on when the switch is on




**293.1**  
Kutija razvodna  
sa 6 ulova za na zid  
80x80 500V **IP55**  
*Wall mounted junction box  
with 6 cable glands  
80x80 500V IP55*

## PRIKLJUČNI PRIBOR CONNECTING ACCESSORIES


- Usaglašeno sa IEC 60884-1, IEC 61643-1.
- Priključni kabl PP/J-Y (H05VV-F) 3x1,5mm<sup>2</sup>.
- Zaštita od dodira kontakta
- Complied with IEC 60884-1, IEC 61643-1.
- Connection cord H05VV-F 3x1,5mm<sup>2</sup>.
- Touch protection.

x = 0      Bela White      x = A      Antracit Anthracite

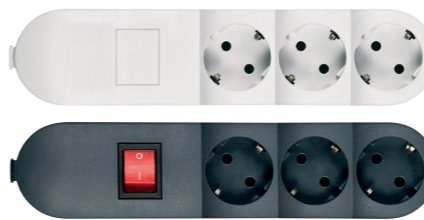

**443.x**  
Priključnica prenosna  
trostruka, bez kabl,  
max 3600W, 3x16A 250V-  
*Triple portable socket  
outlet, without cord,  
max 3600W, 3x16A 250V-*

249 x 58 x 48 mm

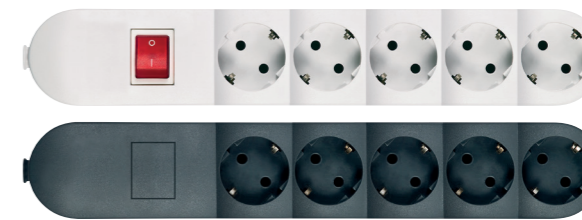


**445.x**  
Priključnica prenosna  
petostruka, bez kabl,  
max 3600W, 5x16A 250V-  
*Fivefold portable socket  
outlet, without cord,  
max 3600W, 5x16A 250V-*


339 x 58 x 48 mm



**4403.x**  
Priključnica prenosna trostruka,  
bez kabl, sa dvopolnom indikatorskom  
sklopkom. max 3600W, 3x16A 250V-  
*Triple portable socket outlet, without  
cord, with double-pole indication switch,  
max 3600W, 3x16A 250V-*

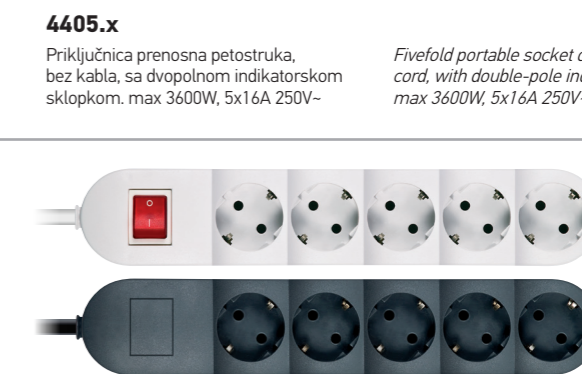


**4405.x**  
Priključnica prenosna petostruka,  
bez kabl, sa dvopolnom indikatorskom  
sklopkom. max 3600W, 5x16A 250V-  
*Fivefold portable socket outlet, without  
cord, with double-pole indication switch,  
max 3600W, 5x16A 250V-*

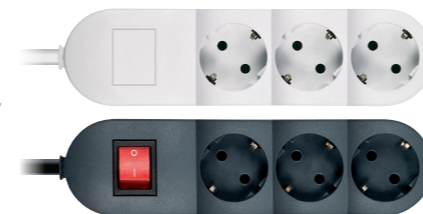

Priključnica prenosna  
nerastavna trostruka,  
max 3600W, 3x16A 250V-  
*Triple portable socket  
outlet unwireable,  
max 3600W, 3x16A 250V-*

219 x 58 x 48 mm

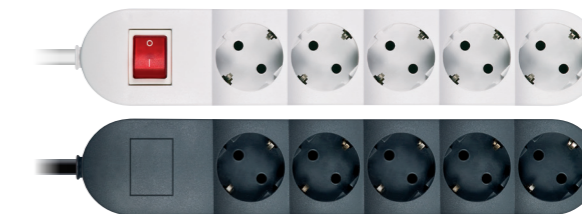


Priključnica prenosna  
nerastavna petostruka,  
max 3600W, 5x16A 250V-  
*Fivefold portable socket  
outlet unwireable,  
max 3600W, 5x16A 250V-*

307 x 58 x 48 mm

kabl dužine cord length	bez sklopke without switch	sa dvopolnom indikatorskom sklopkom with double-pole indication switch
1,5m	<b>4431.x</b>	<b>44301.x</b>
3m	<b>4433.x</b>	<b>44303.x</b>
5m	<b>4435.x</b>	<b>44305.x</b>
10m	<b>4436.x</b>	<b>44306.x</b>


kabl dužine cord length	bez sklopke without switch	sa dvopolnom indikatorskom sklopkom with double-pole indication switch
1,5m	<b>4451.x</b>	<b>44501.x</b>
3m	<b>4453.x</b>	<b>44503.x</b>
5m	<b>4455.x</b>	<b>44505.x</b>
10m	<b>4456.x</b>	<b>44506.x</b>

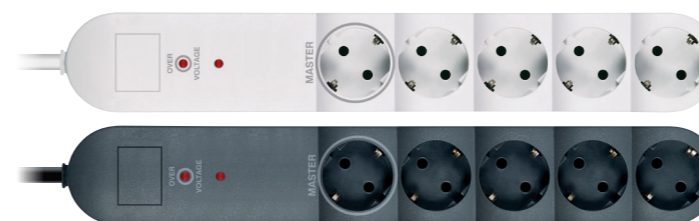

Priključnica prenosna  
nerastavna petostruka,  
sa prenaponskom zaštitom,  
bez sklopke.  
max 3600W, 5x16A 250V-  
*Fivefold portable socket  
outlet unwireable,  
with surge protection,  
without switch,  
max 3600W, 5x16A 250V-*

376 x 58 x 48 mm

- Kabl dužine 1,5m (3m, 5m i 10m po zahtevu).
- Cord length 1,5m (3m, 5m, 10m on special request)

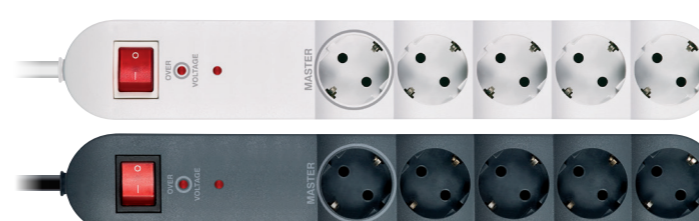

**44601.x**  
sa dvopolnom  
indikatorskom  
sklopkom  
*with double-pole  
indication switch*

**44801.x**  
sa prenaponskom zaštitom klase III, Up<1,5kV, RFI/EMI filterom i prenaponskim filterom za telefon/modem/fax liniju  
*with surge protection class III, Up<1,5kV, RFI/EMI filter and surge filter for phone/modem/fax line*

**44901.x**  
sa prenaponskom zaštitom klase III, Up<1,5kV i 1+4 MASTER-SLAVE (snaga uključena SLAVE priključnice min 15W)  
*with surge protection class III, Up<1,5kV and 1+4 MASTER-SLAVE (switching threshold min 15W)*

**4461.x**  
sa prenaponskom zaštitom klase III, Up<1,5kV  
*with surge protection class III, Up<1,5kV*

**4491.x**  
sa prenaponskom zaštitom klase III, Up<1,5kV i 1+4 MASTER-SLAVE (snaga uključena SLAVE priključnice min 15W)  
*with surge protection class III, Up<1,5kV and 1+4 MASTER-SLAVE (switching threshold min 15W)*

**PRIKLJUČNI PRIBOR**  
**CONNECTING ACCESSORIES**


- Usaglašeno sa IEC 60884-1,
- Mogućnost ugradnje kabla prečnika do 11 mm

- Complied with IEC 60884-1,
- The possibility of installing cable up to 11 mm

**INSTALACIONI PRIBOR**  
**INSTALLATION ACCESSORIES**

**301.0**  
Utikač dvopolni sa kontaktom za uzemljenje 16A/250V~  
*Double-pole plug with earthing contact 16A 250V~*

**301.13**



**302.0**  
Utikač dvopolni bez kontakta za uzemljenje 2,5A/250V~  
**EURO**  
*Double-pole plug without earthing contact 2,5A 250V~ EURO*

**302.13**



- Plosnati kabl do 2 x 0,75 mm<sup>2</sup>
- Flat cable up to 2 x 0,75 mm

**303.0**  
Utikač trolpolni sa kontaktom za uzemljenje L-izvedbe 16A/440V~  
*Tripolar plug with earthing contact L-type 16A 440V~*


**303.13**



- Kabl prečnika do 13 mm
- Izrada od materijala otpornog na udar
- Cable up to 13 mm
- Made from stroke resistant material

**9202.11**  
Kutija razvodna za na zid izrađena od ABS g/w 650°C  
100x100x50 **IP66 500V**  
*Wall mounted junction box made from ABS g/w 650°C 100x100x50 IP66 500V*


**9212.11**  
izrađena od polikarbonata g/w 850°C  
*made from polycarbonate g/w 850°C*



**9203.11**  
Kutija razvodna za na zid izrađena od ABS g/w 650°C  
150x110x70 **IP66 500V**  
*Wall mounted junction box made from ABS g/w 650°C 150x110x70 IP66 500V*

**9213.11**  
izrađena od polikarbonata g/w 850°C  
*made from polycarbonate g/w 850°C*

- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 4 vijka prečnika do 05 mm
- Complied with IEC 60670-1,
- Wall mounting by 4 screws dia. to 5 mm




**307.0**  
Utikač dvopolni sa kontaktom za uzemljenje 16A/250V~  
*Double-pole plug with earthing contact 16A 250V~*

**307.13**



**320.T**  
• Transparentan  
• Transparent

**320.13**  
• Crni  
• Black



**320.0**  
Utikač dvopolni kombinovan sa 3 priključnice sa kontaktom za uzemljenje (T-razvodnik) 16A 250V~  
*Double-pole plug combined with 3 sockets with earthing contact (T-adaptor) 16A 250V~*

**320.13**



- Max opterećenje 3600W
- Max load 3600W

**92021.11**  
Kutija razvodna za na zid sa 8 uvodnica Ø20 izrađena od ABS g/w 650°C  
100x100x50 **IP66 500V**  
*Wall mounted junction box with 8 cable glands Ø20 made from ABS g/w 650°C 100x100x50 IP66 500V*




**92031.11**  
Kutija razvodna za na zid sa 10 uvodnica Ø20 izrađena od ABS g/w 650°C  
150x110x70 **IP66 500V**  
*Wall mounted junction box with 10 cable glands Ø20 made from ABS g/w 650°C 150x110x70 IP66 500V*

- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 4 vijka prečnika do 05 mm
- Uvodnice za kablove Ø20 mm
- Complied with IEC 60670-1,
- Wall mounting by 4 screws dia. to 5 mm
- Cable bushings to Ø20 mm



**308.0**  
Utikač dvopolni sa kontaktom za uzemljenje L-izvedbe 16A/250V~  
*Double-pole plug with earthing contact L-type 16A 250V~*

**308.13**




**4064.0**  
Set pribora za produžni kabl (406, prsten za vezivanje, 304) 16A 250V~ **CONEL**  
*Cord extension set (406, connecting ring, 304) 16A 250V~ CONEL*

**4064.13**



- Prsten za vezivanje koji onemogućuje izvlačenje utikača
- Connecting ring for plug extraction disable

**9212.1T**  
Kutija razvodna za na zid sa transparentnim poklopcem izrađena od polikarbonata g/w 850°C  
100x100x50 **IP56 500V**  
*Wall mounted junction box with transparent cover made from polycarbonate g/w 850°C 100x100x50 IP56 500V*



**9213.1T**  
Kutija razvodna za na zid sa transparentnim poklopcem izrađena od polikarbonata g/w 850°C  
150x110x70 **IP56 500V**  
*Wall mounted junction box with transparent cover made from polycarbonate g/w 850°C 150x110x70 IP56 500V*

- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 4 vijka prečnika do 05 mm
- Complied with IEC 60670-1,
- Wall mounting by 4 screws dia. to 5 mm



**305.0**  
Utikač dvopolni masivni sa kontaktom za uzemljenje 16A/250V~ **MEDIUM**  
*Double-pole massive plug with earthing contact 16A 250V~ MEDIUM*

**305.13**



- Izrada od materijala otpornog na nagnječenja,
- Made from contusion resistant material

**4065.0**  
Set pribora za produžni kabl (406, prsten za vezivanje, 305) 16A 250V~ **MEDIUM**  
*Cord extension set (406, connecting ring, 305) 16A 250V~ MEDIUM*


**4065.13**



- Prsten za vezivanje koji onemogućuje izvlačenje utikača
- Connecting ring for plug extraction disable

**9204.11**  
Kutija razvodna za na zid izrađena od ABS g/w 650°C 150x110x120 **IP66 500V**  
*Wall mounted junction box made from ABS g/w 650°C 150x110x120 IP66 500V*

- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 4 vijka prečnika do 05 mm
- Complied with IEC 60670-1,
- Wall mounting by 4 screws dia. to 5 mm



**9201.11**  
Kutija razvodna za na zid sa 4 uvoda izrađena od ABS g/w 650°C Ø65 **IP44 500V**  
*Wall mounted junction box with 4 cable glands made from ABS g/w 650°C Ø65 IP44 500V*

**9211.11**  
izrađena od polikarbonata g/w 850°C  
*made from polycarbonate g/w 850°C*

- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću 2 vijka prečnika do 05 mm
- Uvodnice za kablove Ø20 mm
- Complied with IEC 60670-1,
- Wall mounting by 2 screws dia. to 5 mm
- Cable bushings to Ø20 mm



**306.0**  
Utikač dvopolni masivni sa kontaktom za uzemljenje 16A/250V~ **STANDARD**  
*Double-pole massive plug with earthing contact 16A 250V~ STANDARD*

**306.13**



- Izrada od materijala otpornog na nagnječenja,
- Made from contusion resistant material

**4066.0**  
Set pribora za produžni kabl (406, prsten za vezivanje, 306) 16A 250V~ **STANDARD**  
*Cord extension set (406, connecting ring, 306) 16A 250V~ STANDARD*


**4066.13**



- Prsten za vezivanje koji onemogućuje izvlačenje utikača
- Connecting ring for plug extraction disable


**901**  
Adapter za ugradnju na zid 80x80  
*Adaptor for wall mounting 80x80*

- Ugradnja na zid pomoću vijaka,
- Veza sa razvodnim kanalima,
- Mogućnost instalacije pomoću vijaka
- Wall mounted by screws,
- Cable ducts connection,
- Accessory installation by screws




**931.0**  
Uvodnica kablovska PVC za kablove do Ø20 mm  
*Cable gland PVC for cables up to Ø20 mm*

**931.1**  
• Ugradnja u otvor Ø23 mm  
• Mounting into the hole Ø23 mm



**933.0**  
Uvodnica kablovska PVC za kablove do Ø14 mm  
*Cable gland PVC for cables up to Ø14 mm*

**933.1**  
• Ugradnja u otvor Ø20,5 mm  
• Mounting into the hole Ø20,5 mm



**932.0**  
Otvorena  
*Open*

**932.1**



**3004.13**  
• Gumena navlaka  
• Rubber cover

**304.0**  
Utikač dvopolni masivni sa kontaktom za uzemljenje 16A/250V~ **CONEL**  
*Double-pole massive plug with earthing contact 16A 250V~ CONEL*

**304.13**



- Izrada od materijala otpornog na nagnječenja
- Made from contusion resistant material

**4006.13**  
• Gumena navlaka  
• Rubber cover

**406.0**  
Priključnica prenosna dvopolna sa kontaktom za uzemljenje kuplung 16A/250V~  
*Double-pole portable socket outlet with earthing contact 16A 250V~*

**406.13**



- Izrada od materijala otpornog na nagnječenja
- Made from contusion resistant material

**700**  
Kutija montažna Ø60x40 nizajuća za rastojanje 71mm  
*Mounting box Ø60x40 for sequencing with 71mm step*


**710**  
Ø60x60

- Usaglašeno sa IEC 60670-1,
- Ugradnja u zid,
- Mogućnost instalacije pomoću stegača ili vijaka




**800**  
Kutija montažna Ø60x40 nizajuća za rastojanje 80mm  
*Mounting box Ø60x40 for sequencing with 80mm step*

- Complied with IEC 60670-1,
- Flush mounted,
- Accessory installation by clamps or screws



**804**  
Kutija montažna Ø70 za trolpolne priključnice  
*Mounting box Ø70 for three pole sockets*



**216.0**  
Sklopka jednopolna pregibna međugajtanska 16AX 250V~  
*Single-pole intercord rocker switch 16AX 250V~*


**216.13**



- Usaglašeno sa IEC 60669-1,
- Mogućnost ugradnje kabla prečnika do 7 mm
- Complied with IEC 60669-1,
- The possibility of installing cable up to 7 mm

Priključnica dvopolna **IP 54** 16A/250V~  
*Double-pole socket outlet IP 54 16A*


**231.00**  
**231.11**  
**231.44**

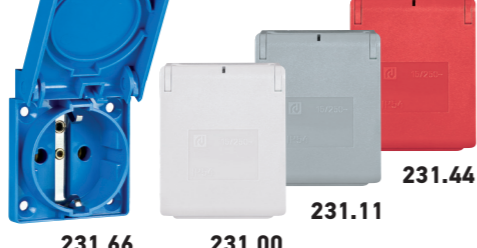

- Ugradnja na panel pomoću vijaka
- Panel mounting by screws

**900**  
Kutija razvodna 100x100 poklopac sa vijkom 500V  
*Junction box 100x100 with screw cover 500V*

- Usaglašeno sa IEC 60670-1,
- Ugradnja u zid
- Complied with IEC 60670-1,
- Flush mounted

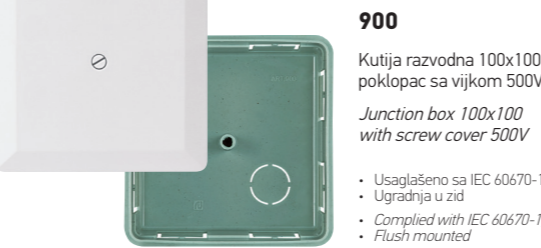

**910.0**  
Zaštitna maska za zid 140x180  
*Wall protection cover 140x180*


- Ugradnja ispod maske
- Under cover frame mounting

**PP910.0**  
Pakovanje 5 kom.  
*Pack of 5 pcs.*



**910.T**  
• Transparentna  
• Transparent

**PP910.T**  
Pakovanje 5 kom.  
*Pack of 5 pcs.*



# TERMOPLASTIČNA SIJALIČNA GRLA THERMOPLASTIC LAMP HOLDERS

x = 0

Bela  
White

x = A

Crna  
Black

■ Temperaturna otpornost  
Temperature resistance



**11011.x** ■ T180  
**11012.x** ■ T210  
Grlo E14 viseće  
*Lamp holder E14 hanging*  
• Navoj za nazuvicu M10x1  
• Threaded M10x1



**12011.x** ■ T180  
**12012.x** ■ T210  
Grlo E27 viseće  
*Lamp holder E27 hanging*  
• Navoj za nazuvicu M10x1  
• Threaded M10x1



**11021.x** ■ T180  
**11022.x** ■ T210  
Grlo E14 luster  
*Lamp holder E14 chandelier*  
• Navoj za nazuvicu M10x1  
• Threaded M10x1



**12021.x** ■ T180  
**12022.x** ■ T210  
Grlo E27 luster  
*Lamp holder E27 chandelier*  
• Navoj za nazuvicu M10x1  
• Threaded M10x1



**11023.x** ■ T180  
**11024.x** ■ T210  
Grlo E14 luster sa obodom  
*Lamp holder E14 chandelier with flange*  
• Navoj za nazuvicu M10x1  
• Threaded M10x1



**12023.x** ■ T180  
**12024.x** ■ T210  
Grlo E27 luster sa obodom  
*Lamp holder E27 chandelier with flange*  
• Navoj za nazuvicu M10x1  
• Threaded M10x1



**11031.x** ■ T180  
**11032.x** ■ T210  
Grlo E14 luster kratko  
*Lamp holder E14 chandelier short*  
• Navoj za nazuvicu M10x1  
• Threaded M10x1



**12031.x** ■ T180  
**12032.x** ■ T210  
Grlo E27 luster kratko  
*Lamp holder E27 chandelier short*  
• Navoj za nazuvicu M10x1  
• Threaded M10x1



**11041.x** ■ T180  
**11042.x** ■ T210  
Grlo E14 stojeće za vijak  
*Lamp holder E14 standing for screw*  
• Za vezu sa vijkom  
• Connection with screw



**12041.x** ■ T180  
**12042.x** ■ T210  
Grlo E27 stojeće za vijak  
*Lamp holder E27 standing for screw*  
• Za vezu sa vijkom  
• Connection with screw



**11043.x** ■ T180  
**11044.x** ■ T210  
Grlo E14 stojeće za utiskivanje  
*Lamp holder E14 standing for indentation*  
• Za vezu utiskivanjem  
• Connection with indentation



**12043.x** ■ T180  
**12044.x** ■ T210  
Grlo E27 stojeće za utiskivanje  
*Lamp holder E27 standing for indentation*  
• Za vezu utiskivanjem  
• Connection with indentation



**12013.x** ■ T180  
**12014.x** ■ T210  
Grlo E27 zidno - ravno  
*Lamp holder E27 for wall - flat*  
• Za vezu sa vijkom  
• Connection with screw



**12015.x** ■ T180  
**12016.x** ■ T210  
Grlo E27 zidno - ravno  
*Lamp holder E27 for wall - flat*  
• Za vezu sa vijkom  
• Connection with screw

## KERAMIČKA SIJALIČNA GRLA / CERAMIC LAMP HOLDERS



**1300**  
Grlo E27 stojeće  
*Lamp holder E27 standing*  
• sa metalnim nosačem  
• with metal bracket



**1330**  
Grlo E27 viseće  
*Lamp holder E27 hanging*  
• Navoj za nazuvicu M10x1  
• Threaded M10x1