



PRESTIGE

KVALITET I SIGURNOST U PROIZVODNJI
ELEKTROMATERIJALA

PRESTIGE

QUALITY AND SAFETY IN PRODUCTION
OF ELECTRICAL INSTALLATION MATERIALS



PRESTIGE

Sklopke i priključnice PRESTIGE line oplemenjene su jednostavnošću tehničkih rešenja i izuzetno lakom ugradnjom.

Izrađene su savremenim tehnološkim postupkom od visokokvalitetnih materijala.

PRESTIGE line switches and socket outlets are enriched due to their simplicity of technical solutions and very simple installation.

Products are made by modern technological process and with high quality materials.



DIZAJN OBLIKUJE NAŠ SVET

PRESTIGE

DESIGN SHAPES OUR WORLD




Dizajn i boje PRESTIGE line programa
savršeno se uklapaju u vaše enterijere.


*Design and colours of PRESTIGE line
perfectly match with your interiors.*

VRLO JEDNOSTAVAN - VEOMA IZRAŽAJAN - KLASIČAN
VERY SIMPLE - VERY EXPRESSIVE - CLASICAL


TEHNIČKE PREDNOSTI
TECHNICAL ADVANTAGES

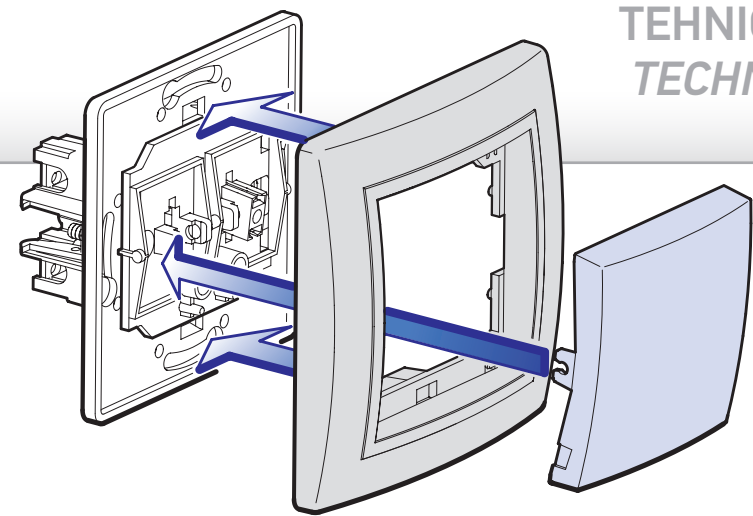

Masku i taster sklopke postavljamo i skidamo veoma jednostavno.
Ova kombinacija će Vam i pored jednostavnosti obezbediti dugotrajan i pouzdan rad.
*Installation of decorative cover frame and switch button is very simple and easy.
Beside simplicity, this combination is providing a long and reliable usage.*

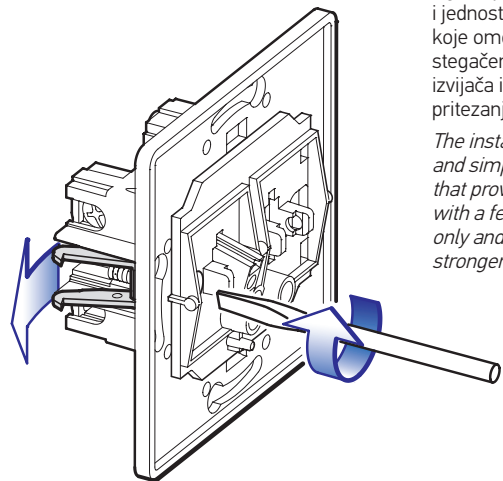


Ugradnja pomoću stegača je brza i jednostavna zahvaljujući rešenju koje omogućava pritezanje stegačem sa vrlo malo okretaja izvijača i bez potrebe jačeg pritezanja vijka.
The installation by clamps is quick and simple thanks to the solution that provides tightening by clamps with a few screwdriver turnings only and without any necessity for stronger screw tightening.

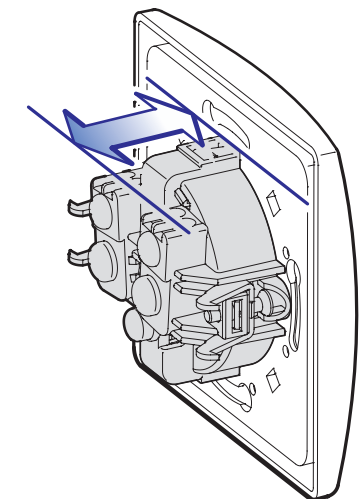


Plastična priključnica je izrađena tako da zauzima veoma malo prostora u montažnoj kutiji čime se montaža pojednostavljuje zbog većeg prostora za smeštaj provodnika.
Socket outlet is made to take a very little space in installation box. Installation is simple because of enough space for conductors.

BEZVIJČANA MONTAŽA
SCREWLESS INSTALLATION

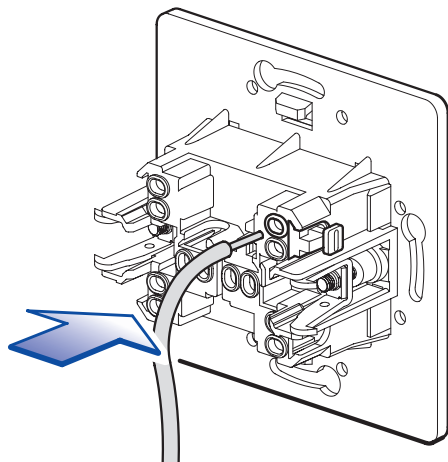

Bezvičajni kontakti omogućuju pouzdanu i brzu montažu do dva provodnika preseka 2,5 mm², bez upotrebe alata za stezanje.
Screwless contacts are allowing safe and fast installation up to two conductors with diameter 2,5 mm², without screwdriver.


VIJČANA MONTAŽA
INSTALLATION WITH SCREWS

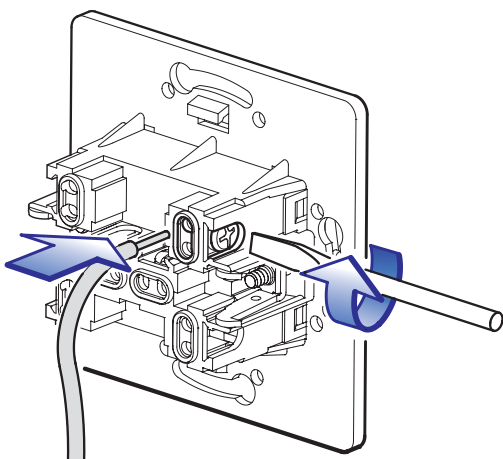

Pritezanje provodnika obezbeđeno je pouzdanom i sigurnom vijčanom vezom za provodnike preseka do 4 mm². Priključivanje provodnika je veoma brzo jer je obezbeđeno njegovo postavljanje bez mogućnosti isklizavanja tokom pritezanja.
The tightening of conductors is provided by the reliable and safe screw joint for the conductors section to 4 mm². The connecting of conductors is very quick as their setting up is secured without any possibility of slipping out during tightening.

BOJE PREDNJIH ELEMENATA
FRONT ELEMENTS COLORS


art.605.XX



Označavanje sa 2 cifre:
prva cifra - šifra boje maske sa međuramom
druga cifra - šifra boje središnjeg dela (taster, blok)

Marking with 2 digits:
first digit - code of mask with interframe color
second digit - code of middle part color (push-button, block)

art.605.XXX



Označavanje sa 3 cifre:
prva cifra - šifra boje maske
druga cifra - šifra boje međurama
treća cifra - šifra boje središnjeg dela (taster, blok)

Marking with 3 digits:
first digit - code of mask color
second digit - code of interframe color
third digit - code of middle part color (push-button, block)

Standardno se izrađuju boje:
The standard colors are:

x = 0




Bela
White
RAL 9003

x = 1



Siva
Grey
RAL 7035

x = 2



Grafit sa metalik efektom
Graphite with metallic effect
RAL 7021

x = 3



Bordo
Dark red
RAL 3004

x = 9



Krem
Beige
RAL 1013

x = S



Srebrna
Silver

x = E1



Crna Soft Touch
Black Soft Touch



000
Bela
White



S2S
Srebrna, grafit, srebrna
Silver, graphite, silver



330
Bordo, bordo, bela
Dark red, dark red, white



220
Grafit, grafit, bela
Graphite, graphite, white



212
Grafit, siva, grafit
Graphite, grey, graphite



00
Bela
White



99
Krem
Beige



E1E1
Crna Soft Touch
Black Soft Touch

Maske sa međuramom
Frames with interframe


STANDARDNE BOJE

PRESTIGE

STANDARD COLORS



Bela
White

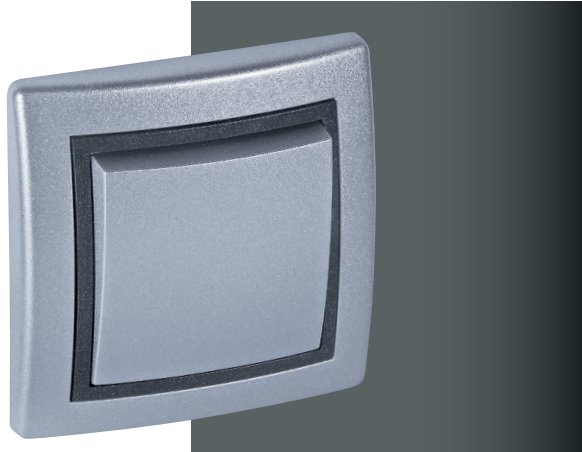


Srebrna, grafit, srebrna
Silver, graphite, silver



Krem
Beige



Grafit, grafit, bela
Graphite, graphite, white

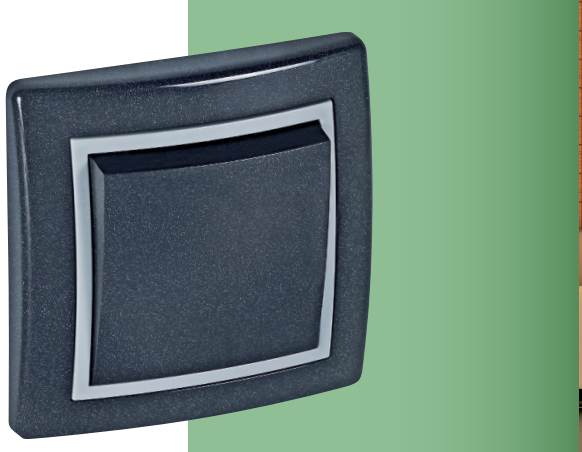

Grafit, siva, grafit
Graphite, grey, graphite



Bordo, bordo, bela
Dark red, dark red, white



Crna Soft Touch
Black Soft Touch

PRESTIGE

SKLOPKE SWITCHES

- Usaglašeno sa IEC 60669-1
- Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka

- Complied with IEC 60669-1
- Wall mounted into the installation box Ø60 by clamps or screws

000

Bela
White

220

Grafit, grafit, bela
Graphite, graphite, white

330

Bordo, bordo, bela
Dark red, dark red, white

Maske sa međuramom
Frames with interframe

E1E1

Crna Soft Touch
Black Soft Touch

S2S

Srebrna, grafit, srebrna
Silver, graphite, silver

212

Grafit, siva, grafit
Graphite, grey, graphite

00

Bela
White

99

Krem
Beige

605.xxx

Sklopka jednopolna
10AX/250V~

Single-pole switch
10AX/250V~

60544.xx

IP44 stepen zaštite
IP44 protection level

608.xxx

Sklopka ukrсна
10AX/250V~

Intermediate switch
10AX/250V~

60844.xx

IP44 stepen zaštite
IP44 protection level

625.xxx

Sklopka jednopolna
sa indikacijom 10AX/250V~

Single-pole switch
with indication 10AX/250V~

62544.xx

IP44 stepen zaštite
IP44 protection level

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off

619.xxx

Sklopka jednopolna
sa indikacijom 16AX/250V~

Single-pole switch
with indication 16AX/250V~

61944.xx

IP44 stepen zaštite
IP44 protection level

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off

6052.xxx

Sklopka dvopolna
10AX/250V~

Double-pole switch
10AX/250V~

605244.xx

IP44 stepen zaštite
IP44 protection level

609.xxx

Taster sklopka za svetlo
bez indikacije 10A/250V~

Light push-button switch
without indication 10A/250V~

60944.xx

IP44 stepen zaštite
IP44 protection level

626.xxx

Sklopka serijska sa
indikacijom 10AX/250V~

Serial switch with
indication 10AX/250V~

62644.xx

IP44 stepen zaštite
IP44 protection level

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off

6191.xxx

Sklopka jednopolna
indikatorska 16AX/250V~

Single-pole switch
with indicator 16AX/250V~

619144.xx

IP44 stepen zaštite
IP44 protection level

- Indikacija svetli kada je sklopka uključena
- Indication is on when the switch is on

606.xxx

Sklopka serijska
10AX/250V~

Serial switch
10AX/250V~

60644.xx

IP44 stepen zaštite
IP44 protection level

6091.xxx

Taster sklopka za svetlo
sa indikacijom 10A/250V~

Light push-button switch
with indication 10A/250V~

609144.xx

IP44 stepen zaštite
IP44 protection level

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off

627.xxx

Sklopka naizmjenična sa
indikacijom 10AX/250V~

Two-way switch with
indication 10AX/250V~

62744.xx

IP44 stepen zaštite
IP44 protection level

- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open

6090.xxx

Taster sklopka
10A/250V~

Push-button
switch 10A/250V~

609044.xx

IP44 stepen zaštite
IP44 protection level

607.xxx

Sklopka naizmjenična
10AX/250V~

Two-way switch
10AX/250V~

60744.xx

IP44 stepen zaštite
IP44 protection level

610.xxx

Taster sklopka za zvono
bez indikacije 10A/250V~

Bell push-button switch
without indication 10A/250V~

61044.xx

IP44 stepen zaštite
IP44 protection level

628.xxx

Sklopka ukrсна sa
indikacijom 10AX/250V~

Intermediate switch with
indication 10AX/250V~

62844.xx

IP44 stepen zaštite
IP44 protection level

- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open

6075.xxx

Taster sklopka za
roletne 10A/250V~

Rolling shutter push-button
switch 10A/250V~

607544.xx

IP44 stepen zaštite
IP44 protection level

- Upravljanje kretanjem elektromotora za roletne u dva smera
- Control of shutters' electric motor movement in two directions

6072.xxx

Sklopka naizmjenična
dvostruka 10AX/250V~

Two-way switch double
10AX/250V~

607244.xx

IP44 stepen zaštite
IP44 protection level

6101.xxx

Taster sklopka za zvono
sa indikacijom 10A/250V~

Bell push-button switch
with indication 10A/250V~

610144.xx

IP44 stepen zaštite
IP44 protection level

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off

6095.xx

Taster sklopka kartična
PRESTIGE line 10A/250V~

Push-button card switch
PRESTIGE line 10A/250V~

6808.xx

Slepi poklopac
maske PRESTIGE

Mask cover
PRESTIGE, complete
with frame

6092.xx

Taster sklopka
serijska 10A/250V~

Serial push-button
switch 10A/250V~

609244.xx

IP44 stepen zaštite
IP44 protection

PRESTIGE

REGULATORI JAČINE SVETLOSTI DIMMERS



617.xxx

Regulator jačine svetlosti
sa naizmeničnom sklopkom
40-400VA, 230V~/50Hz

*Dimmer with
two-way switch
40-400VA, 230V~/50Hz*

- Za sijalice sa užarenim vlaknom i halogene sijalice sa standardnim transformatorom
- Usaglašeno sa IEC 60669-2-1
- Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka

- *For incandescent filament lamps and halogen lamps with standard transformer*
- *Complied with IEC 60669-2-1*
- *Wall mounted into the installation box Ø60 by clamps or screws*



6173.xxx

Regulator jačine svetlosti
sa rotacionom jednopolnom
sklopkom 40-400VA,
230V~/50Hz

*Dimmer with rotary
single-pole switch
40-400VA, 230V~/50Hz*

- Za sijalice sa užarenim vlaknom i halogene sijalice sa standardnim transformatorom
- Usaglašeno sa IEC 60669-2-1
- Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka

- *For incandescent filament lamps and halogen lamps with standard transformer*
- *Complied with IEC 60669-2-1*
- *Wall mounted into the installation box Ø60 by clamps or screws*



6175.xxx


Regulator jačine svetlosti
za LED, 1-100W

Dimmer for LED, 1-100W

- Univerzalni elektronski regulator za sve vrste sijalica
- Osnovna namena za CFL i LED dimabilne sijalice 1-100W
- Usaglašeno sa IEC 60669-2-1

- *Universal dimmer for all types of bulbs*
- *The main purpose for dimmable CFL and LED bulbs 1-100W*
- *Complied with IEC 60669-2-1*

IZLAZ KABLA / CABLE OUTLET



640.x

Izlaz kabla PRESTIGE
5x2,5mm² 450V

Cable outlet PRESTIGE
5x2,5mm² 450V, complete
with frame



641.xx 641.xxx

Izlaz kabla PRESTIGE
Cable outlet PRESTIGE,
complete with frame



642.xx 642.xxx

Izlaz kabla sa stezaljkama
PRESTIGE, 3x2,5 mm² 450V

*Cable outlet with terminals
PRESTIGE, 3x2,5 mm² 450V,
complete with frame*

PRESTIGE

PRIKLJUČNICE SOCKET OUTLETS

- Usaglašeno sa IEC 60884-1
- Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka

- *Complied with IEC 60884-1*
- *Wall mounted into the installation box Ø60 by clamps or screws*



600.xxx

Priključnica dvopolna 16A/250V~
sa porcelanskim jezgrom

*Double-pole socket outlet 16A/250V~
with porcelain insert*



603.xxx

Priključnica dvopolna
sa poklopcem 16A/250V~
sa porcelanskim jezgrom

*Double-pole socket outlet
with cover 16A/250V~
with porcelain insert*



601.xxx

Priključnica dvopolna 16A/250V~
sa porcelanskim jezgrom
i zaštitom od dodira

*Double-pole socket outlet
16A/250V~ with porcelain insert
and touch protection*



633.xxx

Priključnica dvopolna
sa poklopcem 16A/250V~
sa polikarbonatskim jezgrom

*Double-pole socket outlet
with cover 16A/250V~
with polycarbonate insert*



630.xxx

Priključnica dvopolna 16A/250V~
sa polikarbonatskim jezgrom

*Double-pole socket outlet 16A/250V~
with polycarbonate insert*



623.xx

Priključnica dvopolna
16A/250V~, **IP44** sa
polikarbonatskim jezgrom

*Double-pole socket outlet
16A/250V~ **IP44** with
polycarbonate insert*



604.xx

Priključnica dvopolna
dvostruka 16A/250V~
sa polikarbonatskim jezgrom

*Double-pole socket outlet
16A/250V~ double
with polycarbonate insert*

- Nema mogućnost ugradnje u višestruke maske
- *No possibility of mounting into multiple masks*



602.xx

Priključnica trolna 16A/440V~
sa porcelanskim jezgrom

*Tripolar socket outlet 16A/440V~
with porcelain insert*

- Ugradnja u zid u montažnu kutiju Ø70 pomoću vijaka
- *Wall mounted into the installation box Ø70 by screws*



6021.xx

Priključnica trolna 16A/440V~
sa polikarbonatskim jezgrom

*Tripolar socket outlet 16A/440V~
with polycarbonate insert*

- Ugradnja u zid u montažnu kutiju Ø70 pomoću vijaka
- *Wall mounted into the installation box Ø70 by screws*



PRESTIGE

PRIKLJUČNICE SOCKET OUTLETS

PRESTIGE

KOMUNIKACIJE COMMUNICATIONS



- Usaglašeno sa IEC 60603-7
- Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka
- Complied with IEC 60603-7
- Wall mounted into the installation box Ø60 by clamps or screws

630.04

Priključnica dvopolna 16A/250V~ sa polikarbonatskim jezgrom Za mreže sa UPS (sa transformatorom) - crvena

Double-pole socket outlet 16A/250V~ with polycarbonate insert For power networks with UPS (with transformer) - red

630.0N

Priključnica dvopolna 16A/250V~ sa polikarbonatskim jezgrom Za mreže sa generatorskim napajanjem preko transformatora -narandžasta

Double-pole socket outlet 16A/250V~ with polycarbonate insert For power networks with generator supply via transformer - orange

630.012

Priključnica dvopolna 16A/250V~ sa polikarbonatskim jezgrom Za mreže sa zaštićenim generatorskim napajanjem - zelena

Double-pole socket outlet 16A/250V~ with polycarbonate insert For power networks with protected generator supply via transformer - green



611.xxx

Priključnica telefonska dvostruka RJ12 6/2 sa dve odvojene linije

Double telephone socket RJ12 6/2 with two separate lines



613.xxx RJ12 6/4 Cat3

6131.xxx RJ12 6/6 Cat3

Priključnica telefonska dvostruka sa Keystone modulima

Double telephone socket with Keystone modules

- Montaža provodnika bez upotrebe alata
- Toolless conducting wire installation



6045.xx

Priključnica dvopolna dvostruka 16A/250V~ sa polikarbonatskim jezgrom Francuski standard

Double-pole socket outlet 16A/250V~ double with polycarbonate insert French standard

- Nema mogućnost ugradnje u višestruke maske
- Usaglašeno sa IEC 60884-1, NF C 61-314
- No possibility of mounting into multiple masks
- Complied with IEC 60884-1, NF C 61-314



635.xxx

Priključnica dvopolna 16A/250V~ Francuski standard

Double-pole socket outlet 16A/250V~ French standard

- Nema mogućnost ugradnje u višestruke maske
- Usaglašeno sa IEC 60884-1, NF C 61-314
- No possibility of mounting into multiple masks
- Complied with IEC 60884-1, NF C 61-314



6350.xxx

Priključnica dvopolna 16A/250V~ sa zaštitom od dodira Francuski standard

Double-pole socket outlet 16A/250V~ with touch protection French standard

- Nema mogućnost ugradnje u višestruke maske
- Usaglašeno sa IEC 60884-1, NF C 61-314
- No possibility of mounting into multiple masks
- Complied with IEC 60884-1, NF C 61-314



614.xxx

Priključnica komunikacijska sa Keystone modulima dvostruka RJ45 Cat5e UTP

Data socket double with Keystone modules RJ45 Cat5e UTP

- Montaža provodnika bez upotrebe alata
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica
- Toolless conducting wire installation
- Wiring according to TIA/EIA-568A or 568B standard for the arrangement of pairs



614S.xxx

Priključnica komunikacijska sa Keystone modulima dvostruka RJ45 Cat5e FTP

Data socket double with Keystone modules RJ45 Cat5e FTP (shielded)

- Montaža provodnika bez upotrebe alata
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica
- Toolless conducting wire installation
- Wiring according to TIA/EIA-568A or 568B standard for the arrangement of pairs



6161.xxx

USB A punjač 2 x USB 2,1A/5V= 2 x USB A charger 2,1A/5V=

- Za punjenje elektronskih uređaja putem standardnog USB porta
- Punjenje dva uređaja istovremeno
- Usaglašeno sa EN 60950-1 EMC direktivom
- For charging of electronic devises via standard USB port
- Enables charging of two devices simultaneously
- Complied with EN 60950-1 and EMC directive



6162.xxx

Priključnica USB/USB Keystone USB/USB socket Keystone

- Za konekciju USB uređaja i kablova (nije punjač)
- Podržava USB 2.0 standard
- For connection of USB devices and cables (not charging unit)
- Supports USB 2.0 standard



615.xxx

Priključnica komunikacijska sa Keystone modulima dvostruka RJ45 Cat6 UTP

Data socket double with Keystone modules RJ45 Cat6 UTP

- Montaža provodnika bez upotrebe alata
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica
- Toolless conducting wire installation
- Wiring according to TIA/EIA-568A or 568B standard for the arrangement of pairs



615S.xxx

Priključnica komunikacijska sa Keystone modulima dvostruka RJ45 Cat6 FTP

Data socket double with Keystone modules RJ45 Cat6 FTP (shielded)

- Montaža provodnika bez upotrebe alata
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica
- Toolless conducting wire installation
- Wiring according to TIA/EIA-568A or 568B standard for the arrangement of pairs



6166.xxx

USB C punjač 3A/5V= USB C charger 3A/5V=

- Za punjenje elektronskih uređaja putem USB C porta
- Usaglašeno sa EN 60950-1 EMC direktivom
- For charging of electronic devises via USB C port
- Complied with EN 60950-1 and EMC directive



6163.xxx

Priključnica HDMI/HDMI Keystone HDMI/HDMI socket Keystone

- Za konekciju kablova za prenos signala preko HDMI priključka
- For the transmission of signal through HDMI connector



616.xxx

Priključnica komunikacijska sa Keystone modulom RJ45 Cat6A UTP

Data socket with Keystone module RJ45 Cat6A UTP

- Montaža provodnika bez upotrebe alata
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica
- Toolless conducting wire installation
- Wiring according to TIA/EIA-568A or 568B standard for the arrangement of pairs



616S.xxx

Priključnica komunikacijska sa Keystone modulom RJ45 Cat6A FTP

Data socket with Keystone module RJ45 Cat6A FTP (shielded)

- Montaža provodnika bez upotrebe alata
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica
- Toolless conducting wire installation
- Wiring according to TIA/EIA-568A or 568B standard for the arrangement of pairs



PRESTIGE

KOMUNIKACIJE COMMUNICATIONS

- Usaglašeno sa IEC 60169-2
- Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka
- Complied with IEC 60169-2
- Wall mounted into the installation box Ø60 by clamps or screws



612L.xxx

Priključnica antenska TV završna za individualne sisteme

TV aerial socket for individual systems

- Muški konektor
- Odvodno slabljenje signala <1 dB
- Male connector
- Connection attenuation <1 dB



612P.xxx

Priključnica antenska TV/FM prolazna
TV/FM aerial socket transient

- Muški konektor TV, ženski konektor FM
- Prolazno slabljenje 4 dB, odvodno 6 dB, sprega TV/FM >20 dB
- Male connector TV, female connector FM
- Throughpass attenuation 4 dB, connection atten. 6 dB, coupling TV/FM >20 dB



612Z.xxx

Priključnica antenska TV/FM završna
TV/FM aerial socket terminal

- Muški konektor TV, ženski konektor FM
- Odvodno slabljenje <2 dB, sprega TV/FM >20 dB
- Male connector TV, female connector FM
- Connection attenuation <2 dB, coupling attenuation TV/FM >20 dB



612S.xxx

Priključnica antenska TV/FM/SAT završna
TV/FM/SAT aerial socket terminal

- Muški konektor TV, ženski konektor FM
- SAT konektor IEC 60169-24 (F tip)
- Odvodno slabljenje <2 dB, sprega TV/FM >20 dB
- Male connector TV, male connector FM
- SAT connector IEC 60169-24 (F type)
- Connection attenuation <2 dB, coupling attenuation TV/FM >20 dB

PRESTIGE

MEHANIZMI BEZ MASKE I MEĐURAMA MECHANISMS WITHOUT COVER FRAME AND INTERFRAME

PRESTIGE



Za ugradnju u višestruke maske proizvodi PRESTIGE line isporučuju se bez pripadajuće maske i međurama, čime je omogućeno da korisnik sam kombinuje boje i grupisanje komponenti. Uz svaki mehanizam isporučuje se taster ili blok u standardnim bojama.

For the installation into the multiple masks, the products of PRESTIGE line are supplied without the pertaining frame and interframe thus enabling the user to make the combination of colours and grouping of components. Each mechanism is supplied with button or the block in standard colours.



000
Bela
White



S2S
Srebrna, grafit, srebrna
Silver, graphite, silver




220
Grafit, grafit, bela
Graphite, graphite, white



212
Grafit, siva, grafit
Graphite, grey, graphite



330
Bordo, bordo, bela
Dark red, dark red, white



Maske sa međuramom
Frames with interframe



00
Bela
White



E1E1
Crna Soft Touch
Black Soft Touch




99
Krem
Beige

- Usaglašeno sa IEC 60669-1
 - Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka
- Complied with IEC 60669-1
 - Wall mounted into the installation box Ø60 by clamps or screws




6005.x
Sklopka jednopolna
10AX/250V~
*Single-pole switch
10AX/250V~*



6009.x
Taster sklopka za svetlo
bez indikacije
10A/250V~
*Light push-button switch
without indication
10A/250V~*




60052.x
Sklopka dvopolna
10AX/250V~
*Double-pole switch
10AX/250V~*




60091.x
Taster sklopka za svetlo
sa indikacijom 10A/250V~
*Light push-button switch
with indication 10A/250V~*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



6006.x
Sklopka serijska
10AX/250V~
*Serial switch
10AX/250V~*



60092.x
Taster sklopka serijska
10A/250V~
*Serial push-button switch
10A/250V~*




6007.x
Sklopka naizmjenična
10AX/250V~
*Two-way switch
10AX/250V~*

6008.x
Sklopka ukrсна
10AX/250V~
*Intermediate switch
10AX/250V~*



6010.x
Taster sklopka za zvono
bez indikacije
10A/250V~
*Bell push-button switch
without indication
10A/250V~*



60072.x
Sklopka naizmjenična
dvostruka 10AX/250V~
*Two-way switch double
10AX/250V~*




60101.x
Taster sklopka za zvono
sa indikacijom 10A/250V~
*Bell push-button switch
with indication 10A/250V~*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off




60090.x
Taster sklopka
10A/250V~
*Push-button switch
10A/250V~*




6025.x
Sklopka jednopolna
sa indikacijom 10AX/250V~
*Single-pole switch
with indication 10AX/250V~*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



6026.x
Sklopka serijska
sa indikacijom 10AX/250V~
*Serial switch
with indication 10AX/250V~*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off




6027.x
Sklopka naizmjenična sa
indikacijom 10AX/250V~
*Two-way switch with
indication 10AX/250V~*

- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open


6028.x
Sklopka ukrсна sa
indikacijom 10AX/250V~
*Intermediate switch with
indication 10AX/250V~*

- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open



6019.x
Sklopka jednopolna
sa indikacijom 16AX/250V~
*Single-pole switch
with indication 16AX/250V~*

- Indikacija svetli kada je strujno kolo otvoreno
- Indication is on when the circuit is open



60191.x
Sklopka jednopolna
indikatorska 16AX/250V~
*Single-pole switch
with indicator 16AX/250V~*

- Indikacija svetli kada je sklopka uključena
- Indication is on when the switch is on



60075.x
Taster sklopka za roletne
10A/250V~
*Rolling shutter push-button
switch 10A/250V~*

- Upravljanje kretanjem elektromotora za roletne u dva smjera
- Control of shutters' electric motor movement in two directions

- Usaglašeno sa IEC 60884-1
- Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka

- Complied with IEC 60884-1
- Wall mounted into the installation box Ø60 by clamps or screws

- Usaglašeno sa IEC 60670-1 i IEC 60670-22
 - Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka
- Complied with IEC 60670-1 and IEC 60670-22
 - Wall mounted into the installation box Ø60 by clamps or screws



6000.x
Priključnica dvopolna
16A/250V~ sa porcelanskim jezgrom
*Double-pole socket outlet
16A/250V~ with porcelain
insert*



6003.x
Priključnica dvopolna
sa poklopcem 16A/250V~
sa porcelanskim jezgrom
*Double-pole socket outlet
with cover 16A/250V~
with porcelain insert*



6041.x
Izlaz kabla
PRESTIGE
*Cable outlet
PRESTIGE,
without frame*



6001.x
Priključnica dvopolna
16A/250V~ sa porcelanskim
jezgrom i zaštitom od dodira
*Double-pole socket outlet
16A/250V~ with porcelain
insert and touch protection*



6033.x
Priključnica dvopolna
sa poklopcem 16A/250V~
sa polikarbonatskim jezgrom
*Double-pole socket outlet
with cover 16A/250V~
with polycarbonate insert*



6042.x
Izlaz kabla sa
stezaljkama
PRESTIGE
3x2,5mm² 450V
*Cable outlet with
terminals PRESTIGE,
3x2,5mm² 450V,
without frame*



6030.x
Priključnica dvopolna
16A/250V~ sa
polikarbonatskim jezgrom
*Double-pole socket
outlet 16A/250V~ with
polycarbonate insert*



 **6035.x**
Priključnica dvopolna
16A/250V~
Francuski standard
*Double-pole socket outlet
16A/250V~ French standard*

- Usaglašeno sa NF C 61-314
- Complied with NF C 61-314



6030.4



6030.N



6030.12



 **60350.x**
Priključnica dvopolna 16A/250V~
sa zaštitom od dodira
Francuski standard
*Double-pole socket outlet
16A/250V~ with touch protection
French standard*

- Usaglašeno sa NF C 61-314
- Complied with NF C 61-314

- Usaglašeno sa IEC 60669-2-1
 - Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka
- Complied with IEC 60669-2-1
 - Ugradnja u zid u montažnu kutiju Ø60 by clamps or screws
- Usaglašeno sa IEC 60603-7
 - Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka
- Complied with IEC 60603-7
 - Wall mounted into the installation box Ø60 by clamps or screws
- Usaglašeno sa IEC 60169-2
 - Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka
- Complied with IEC 60169-2
 - Wall mounted into the installation box Ø60 by clamps or screws



6017.x
Regulator jačine svetlosti sa naizmeničnom sklopkom 40-400VA, 230V~/50Hz
Dimmer with two-way switch 40-400VA, 230V~/50Hz

- Za sijalice sa užarenim vlaknom i halogene sijalice sa standardnim transformatorom,
- For incadescent filament lamps and halogen lamps with standard transformer



6011.x
Priključnica telefonska dvostruka RJ12 6/2 sa dve odvojene linije
Double telephone socket RJ12 6/2 with two separate lines



6014.x
Priključnica komunikacijska sa Keystone modulima dvostruka RJ45 Cat5e UTP
Data socket double with Keystone modules RJ45 Cat5e UTP



6012I.x
Priključnica antenska TV završna za individualne sisteme
TV aerilal socket for individual systems

- Muški konektor
- Odvodno slabljenje signala <1 dB
- Male connector
- Connection attenuation <1 dB



60173.x
Regulator jačine svetlosti sa rotacionom jednopolnom sklopkom 40-400VA, 230V~/50Hz
Dimmer with rotary single-pole switch 40-400VA, 230V~/50Hz

- Za sijalice sa užarenim vlaknom i halogene sijalice sa standardnim transformatorom,
- For incadescent filament lamps and halogen lamps with standard transformer



6013.x
Priključnica telefonska dvostruka sa Keystone modulima RJ12 6/4 Cat 3
Double telephone socket with Keystone modules RJ12 6/4 Cat 3

- Montaža provodnika bez upotrebe alata
- Toolless conducting wire installation



6014S.x
Priključnica komunikacijska sa Keystone modulima dvostruka RJ45 Cat5e FTP
Data socket double with Keystone modules RJ45 Cat5e FTP



6012Z.x
Priključnica antenska TV/FM završna
TV/FM aerilal socket terminal

- Muški konektor TV, ženski konektor FM
- Odvodno slabljenje <2 dB, sprega TV/FM >20 dB
- Male connector TV, female connector FM
- Connection attenuation <2 dB, coupling attenuation TV/FM >20 dB



60175.x
Regulator jačine svetlosti za LED, 100W
Dimmer for LED, 100W

- Univerzalni elektronski regulator za sve vrste sijalica;
- Osnovna namena za CFL i LED dimabilne sijalice 0-100W;
- Universal dimmer for all types of bulbs;
- The main purpose for dimmable CFL and LED bulbs 0-100W;



60131.x
Priključnica telefonska dvostruka sa Keystone modulima RJ12 6/6 Cat 3
Double telephone socket with Keystone modules RJ12 6/6 Cat 3

- Montaža provodnika bez upotrebe alata
- Toolless conducting wire installation



6015.x
Priključnica komunikacijska sa Keystone modulima dvostruka RJ45 Cat6 UTP
Data socket double with Keystone modules RJ45 Cat6 UTP



6012P.x
Priključnica antenska TV/FM prolazna
TV/FM aerilal socket transient

- Muški konektor TV, ženski konektor FM
- Prolazno slabljenje 4 dB, odvodno 6 dB, sprega TV/FM >20 dB
- Male connector TV, female connector FM
- Throughpass attenuation 4 dB, connection atten: 6 dB, coupling TV/FM >20 dB

- Usaglašeno sa EN 60950-1 EMC direktivom;
- Ugradnja u zid u montažnu kutiju Ø60 pomoću stegača ili vijaka

- Complied with EN 60950-1 and EMC directive;
- Wall mounted into the installation box Ø60 by clamps or screws



60161.x
USB A punjač 2 x USB 2,1A 5V=
2 x USB A charger 2,1A 5V=

- Za punjenje elektronskih uređaja putem standardnog USB porta;
- Punjenje dva uređaja istovremeno;
- For charging of electronic devices via standard USB port;
- Enables charging of two devices simultaneously;



60166.x
USB C punjač 3A 5V=
USB C charger 3A 5V=

- Za punjenje elektronskih uređaja putem USB C porta;
- Usaglašeno sa EN 60950-1 EMC direktivom;
- For charging of electronic devices via USB C port;
- Complied with EN 60950-1 and EMC directive;



60162.x
Priključnica USB/USB Keystone
USB/USB socket Keystone

- Za konekciju USB uređaja i kablova (nije punjač);
- Podržava USB 2.0 standard;
- For connection of USB devices and cables (not charging unit);
- Supports USB 2.0 standard;



60808.x
Slepi poklopac maske PRESTIGE
Mask cover PRESTIGE, without frame



60163.x
Priključnica HDMI/HDMI Keystone
HDMI/HDMI socket Keystone

- Za konekciju kablova za prenos signala preko HDMI priključka;
- For the transmission of signal through HDMI connector;



6015S.x
Priključnica komunikacijska sa Keystone modulima dvostruka RJ45 Cat6 FTP
Data socket double with Keystone modules RJ45 Cat6 FTP

- Montaža provodnika bez upotrebe alata
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica
- Toolless conducting wire installation
- Wiring according to TIA/EIA-568A or 568B standard for the arrangement of pairs



6012S.x
Priključnica antenska TV/FM/SAT završna
TV/FM/SAT aerial socket terminal

- Muški konektor TV, ženski konektor FM
- SAT konektor IEC 60169-24 (F tip)
- Odvodno slabljenje <2 dB, sprega TV/FM >20 dB
- Male connector TV, male connector FM
- SAT connector IEC 60169-24 (F type)
- Connection attenuation <2 dB, oupling attenuation TV/FM >20 dB



6016.x
Priključnica komunikacijska sa Keystone modulom RJ45 Cat6A UTP
Data socket with Keystone module RJ45 Cat6A UTP

- Montaža provodnika bez upotrebe alata
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica
- Toolless conducting wire installation
- Wiring according to TIA/EIA-568A or 568B standard for the arrangement of pairs



6016S.x
Priključnica komunikacijska sa Keystone modulom RJ45 Cat6A FTP
Data socket with Keystone module RJ45 Cat6A FTP (shielded)

- Montaža provodnika bez upotrebe alata
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica
- Toolless conducting wire installation
- Wiring according to TIA/EIA-568A or 568B standard for the arrangement of pairs

	Bela White	x = 0		Grafit Graphite	x = 2		Bordo Dark red	x = 3
	Crna Soft Touch Black Soft Touch	x = E1		Krem Beige	x = 9		Srebrna Silver	x = S




PRESTIGE

MASKE I MEĐURAMOVI COVER FRAMES AND INTERFRAMES


- Usaglašeno sa IEC 60669-1 i IEC 60884-1
- Za ugradnju na PRESTIGE LINE mehanizme ugrađene u zid u nizajuće dozne za višestruke maske (osno rastojanje 71 mm)
- Complied with IEC 60669-1 and IEC 60884-1
- For mounting onto PRESTIGE LINE mechanisms wall mounted in a sequence of boxes for multiple masks (axial distance 71 mm)

	Bela White	x = 0
	Srebrna Silver	x = S
	Grafit Graphite	x = 2
	Bordo Dark red	x = 3


	Bela White	xx = 00
	Krem Beige	xx = 99
	Crna Soft Touch Black Soft Touch	xx = E1E1



6801.x
Maska jednostruka
PRESTIGE line
*One-gang frame
PRESTIGE line*

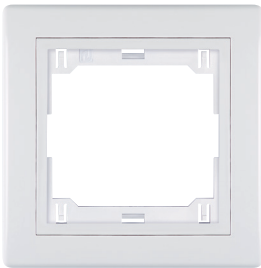


6811.xx
Maska jednostruka
sa međuramom
PRESTIGE line
*One-gang frame
with interframe
PRESTIGE line*

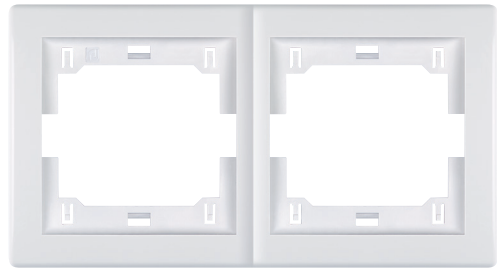


6701.x
Maska dvostruka
PRESTIGE line
horizontalna
*Two-gang frame
PRESTIGE line
horizontal*

6701.xx
Maska dvostruka
sa međuramom
PRESTIGE line
horizontalna
*Two-gang frame
with interframe
PRESTIGE line
horizontal*

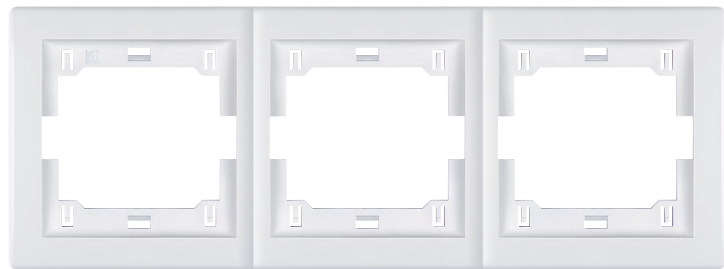


6703.x
Maska trostruka
PRESTIGE line
horizontalna
*Three-gang frame
PRESTIGE line
horizontal*

6703.xx
Maska trostruka
sa međuramom
PRESTIGE line
horizontalna
*Three-gang frame
with interframe
PRESTIGE line
horizontal*

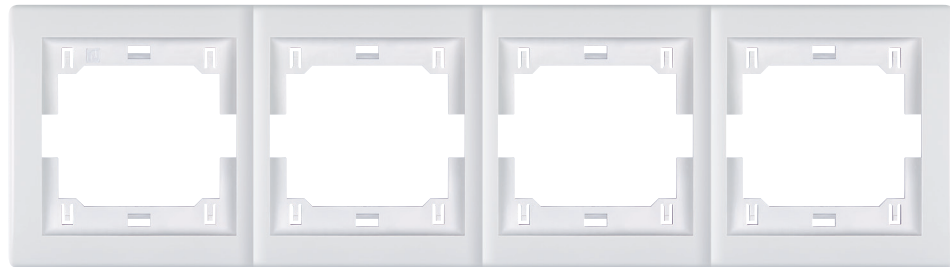


6704.x
Maska četvorostuka
PRESTIGE line
horizontalna
*Four-gang frame
PRESTIGE line
horizontal*

6704.xx
Maska četvorostuka
sa međuramom
PRESTIGE line
horizontalna
*Four-gang frame
with interframe
PRESTIGE line
horizontal*

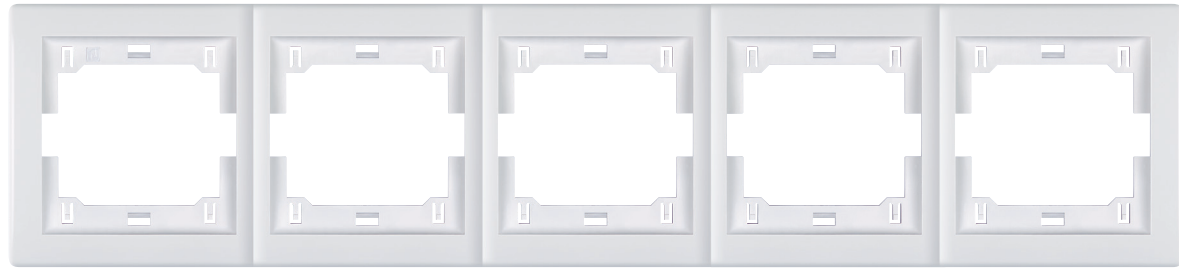


6705.x
Maska petostruka
PRESTIGE line - horizontalna
*Five-gang frame
PRESTIGE line - horizontal*


6705.xx
Maska petostruka
sa međuramom
PRESTIGE line - horizontalna
*Five-gang frame
with interframe
PRESTIGE line - horizontal*

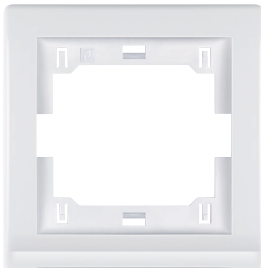


6711.x
Maska dvostruka
PRESTIGE line
vertikalna
*Two-gang frame
PRESTIGE line
vertical*

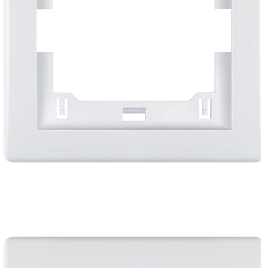




6711.xx
Maska dvostruka
sa međuramom
PRESTIGE line
vertikalna
*Two-gang frame
with interframe
PRESTIGE line
vertical*

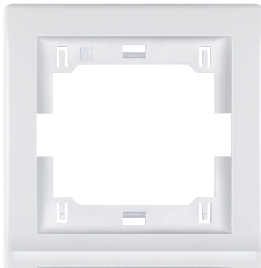

6713.x
Maska trostruka
PRESTIGE line
vertikalna
*Three-gang frame
PRESTIGE line
vertical*

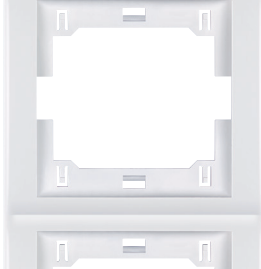


6713.xx
Maska trostruka
sa međuramom
PRESTIGE line
vertikalna
*Three-gang frame
with interframe
PRESTIGE line
vertical*



6714.x
Maska četvorostuka
PRESTIGE line - vertikalna
*Four-gang frame
PRESTIGE line - vertical*


6714.xx
Maska četvorostuka sa međuramom
PRESTIGE line - vertikalna
*Four-gang frame with interframe
PRESTIGE line - vertical*

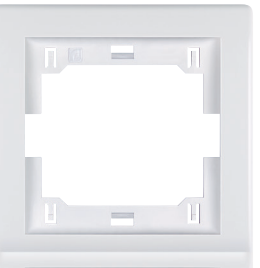

6715.x
Maska petostruka
PRESTIGE line
vertikalna
*Five-gang frame
PRESTIGE line
vertical*


6715.xx
Maska petostruka
sa međuramom
PRESTIGE line
vertikalna
*Five-gang frame
with interframe
PRESTIGE line
vertical*

6802.x
Međuram PRESTIGE line
Interframe PRESTIGE line



- Usaglašeno sa IEC 60669-1 i IEC 60884-1
- Za ugradnju na PRESTIGE line maske kao ukrasni element
- Complied with IEC 60669-1 and IEC 60884-1
- For mounting onto PRESTIGE line frames, like decorative element



Beli	6802.0	White
Sivi	6802.1	Grey
Grafit	6802.2	Graphite
Bordo	6802.3	Dark red
Crveni	6802.4	Red
Svetlo plavi	6802.5	Light blue
Teget	6802.6	Navy-blue
Svetlo zeleni	6802.7	Light green
Žuti	6802.8	Yellow
Krem	6802.9	Beige
Roze	6802.10	Pink
Zeleni	6802.12	Green
Srebrni	6802.5	Silver
Crni Soft Touch	6802.E1	Black Soft Touch

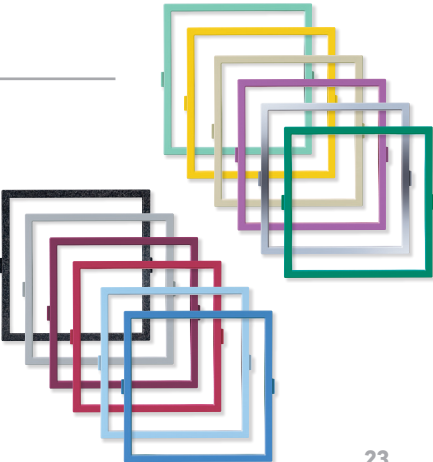



PRESTIGE


ŠEME VEZIVANJA WIRING DIAGRAMS

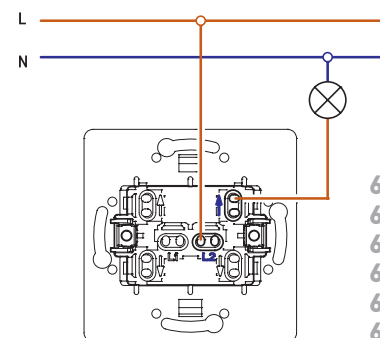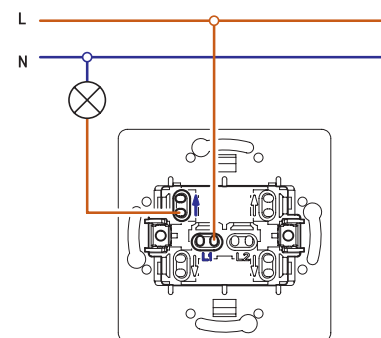

605
6091
610
6101
625
619


Jednopolna sklopka ima dve izvedbe sklopanja (leva i desna) i u skladu s tim se povezuju priključni provodnici.

Single-pole switch is supplied in two wiring executions (left and right) and the conductors are connected accordingly.

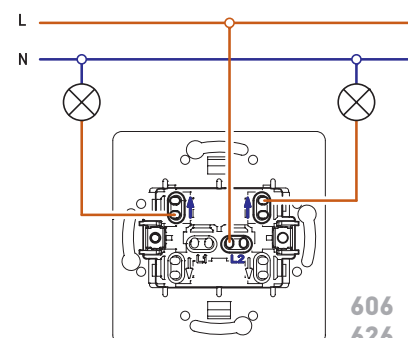


606
626

Serijska sklopka
Serial switch

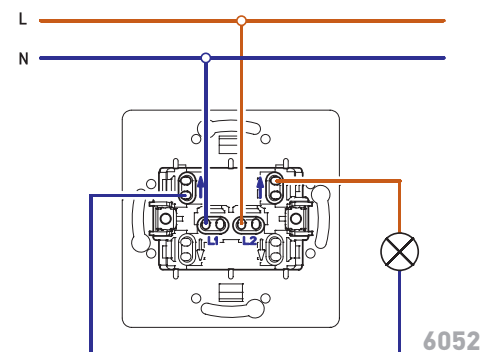


6052

Dvopolna sklopka
Double-pole switch

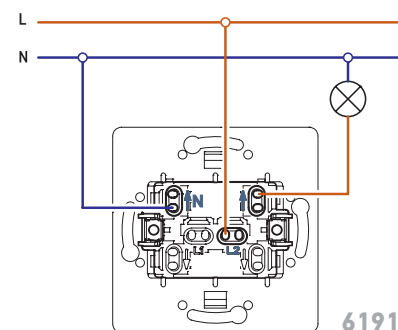



6191

Jednopolne indikatorske sklopke (indikacija svetli kada je sklopka uključena) za povezivanje zahtevaju nulti provodnik
Single-pole indication switches (indication turns on when the switch is on) require neutral conductor to be wired.

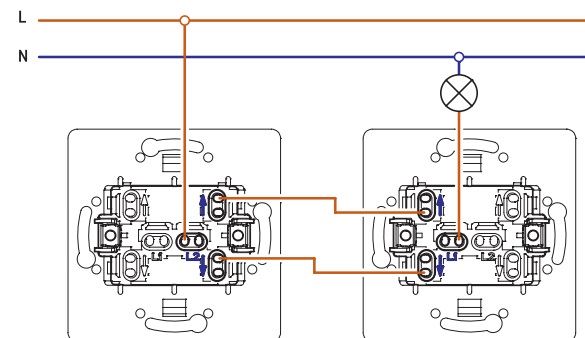

E607
E6072
E627


Naizmenična sklopka, dve izvedbe sklopanja (leva i desna)
Two-way switch, two wiring executions (left and right)

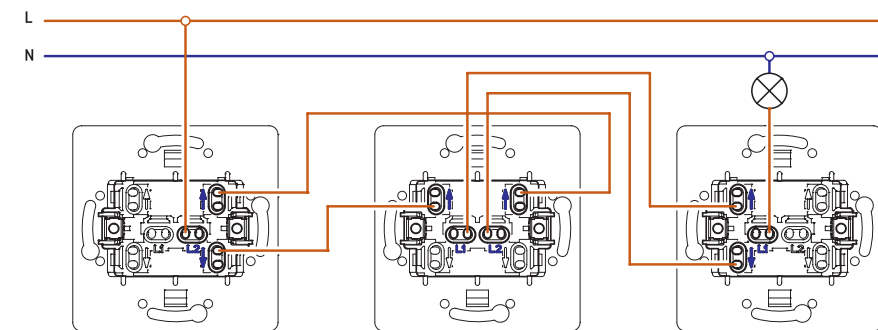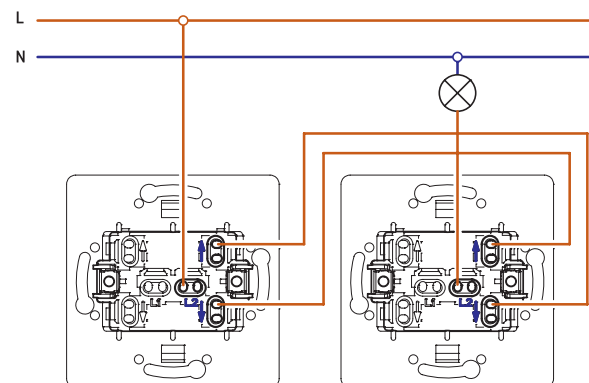

608
628


Ukrсна sklopka se povezuje u kombinaciji sa naizmničnim sklopkama. Može se povezati neograničen broj ukršnih sklopki u kombinaciji sa dve naizmnične.

Intermediate switch is wired in combination with two-way switches. The unlimited number of intermediate switches may be wired in combination with two two-way switches.

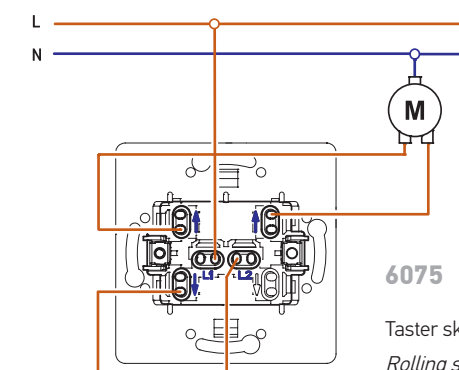


6075

Taster sklopka za roletne
Rolling shutter push-button switch

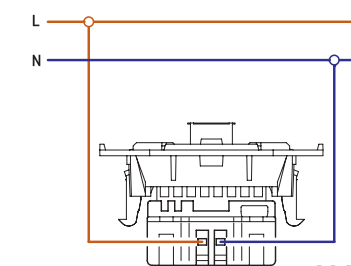


6161

USB punjač
USB charger




617
6173



6175


Povezivanje regulatora jačine svetlosti sa naizmničnom sklopkom kao jednopolne sklopke i regulatora sa rotacionom jednopolnom sklopkom.

Wiring of dimmer with two-way switch and the dimmer with rotary single-pole switch.

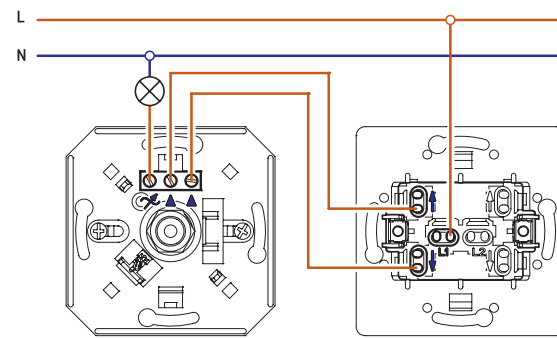


617

Regulator jačine svetlosti sa naizmničnom sklopkom može se povezivati i u kombinaciji sa naizmničnom sklopkom za regulaciju sa jednog mesta i uključivanje i isključivanje sa dva mesta. Međusobno povezivanje više regulatora nije moguće.

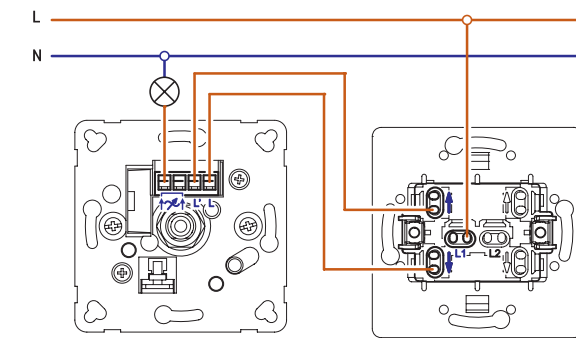

6175


Dimmer with two-way switch may be also wired in combination with two-way switch for the regulation from one place and switching on and off from two places. Inter-wiring of more regulators is not possible.

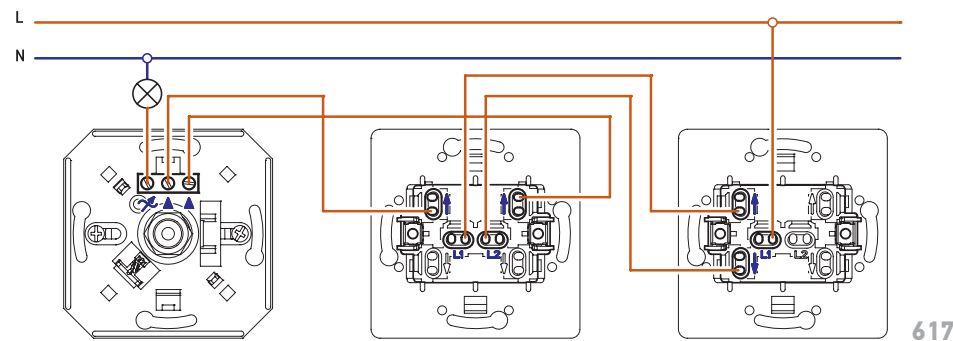


617

Kombinacijom regulatora sa naizmjeničnom sklopkom i ukrsne i naizmjenične sklopke omogućava se uključivanje i isključivanje sa proizvoljan broj mesta.

The combination of dimer with two-way switch and intermediate and two-way switch provides the switching on and off from the desirable number of places.

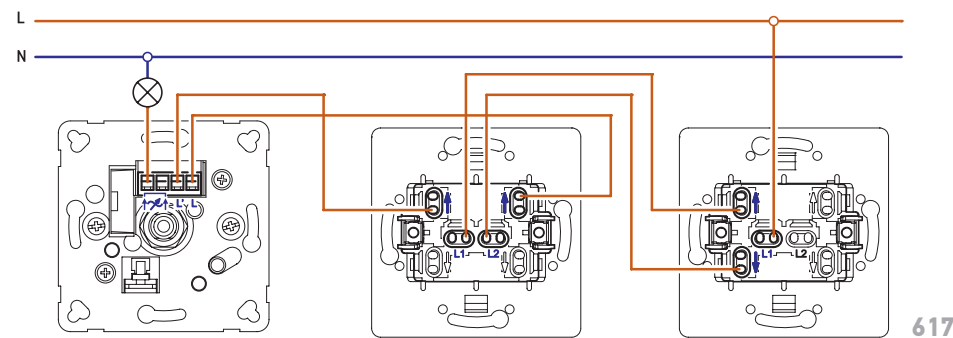

6175

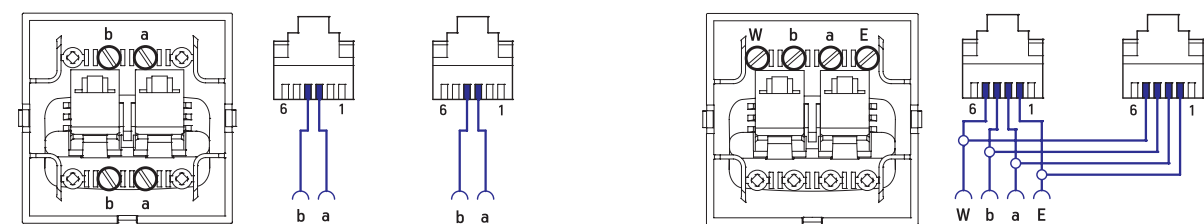


Telefonske priključnice sa standardnim RJ12 konektorima u saglasnosti sa IEC 60603-7 u kombinaciji 2 x 6/2 i 2 x 6/4 kontakta. Povezivanje se vrši prema priloženim šemama gde su kontakti a i b osnovna linija, a W i E kontakti druge parice za analogni terminal (prema internacionalnom standardu).

Telephone sockets with standard RJ12 connectors in compliance with IEC 60603-7 in combination of 2 x 6/2 and 2 x 6/4 contacts. The wiring is carried out in accordance with wiring diagrams where the contacts a and b represent the basic line while W and E are the contacts of the second pair for analogue terminal (according to international standard).



Pripremljen antenski kabl priključujemo pritezanjem u priključnu stezaljku i stezanjem oklopa kabla priteznom papučicom prema datim šemama.


Prepared aerial cable may be installed into terminal and shield tightened by tightening clamp according showed scheme.

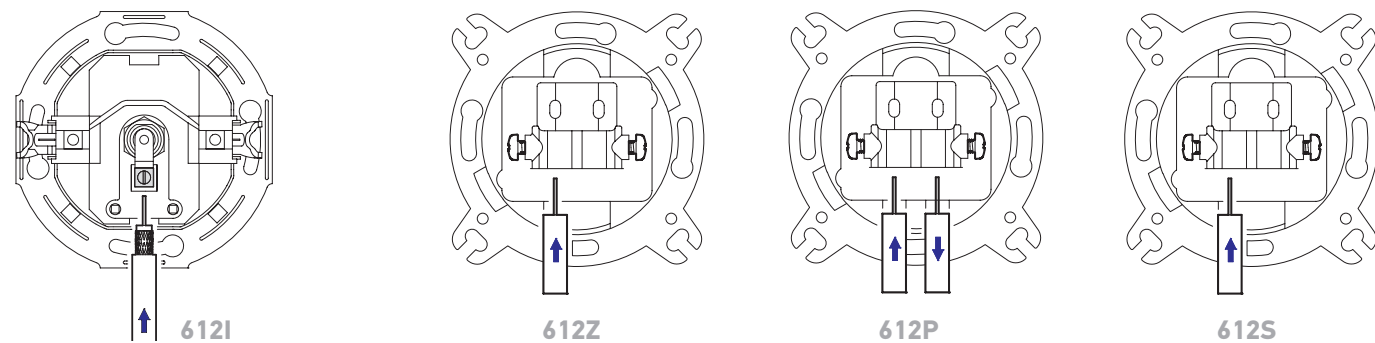


PRESTIGE

DIMENZIJE ZA UGRADNJU INSTALATION DIMENSIONS


- Osnova maske 80 x 80 mm
- Cover frame base 80 x 80 mm

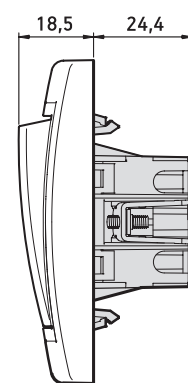


Sklopke
Switches

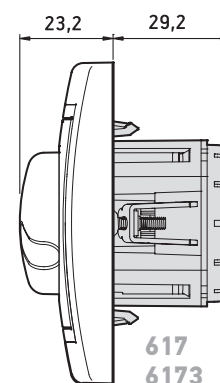

617
6173

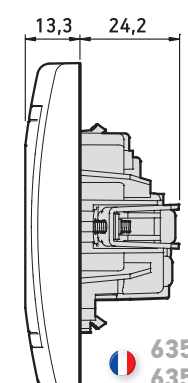


635
6350

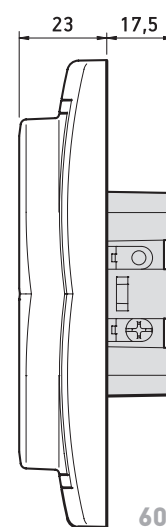











Osnova maske
80 x 123 mm
Cover frame base
80 x 123 mm

604

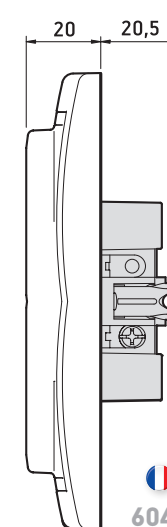

Osnova maske
80 x 123 mm
Cover frame base
80 x 123 mm







6045

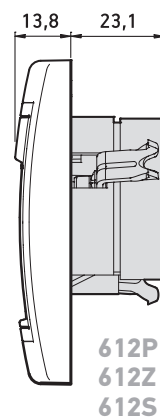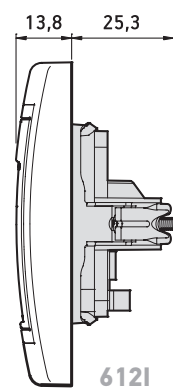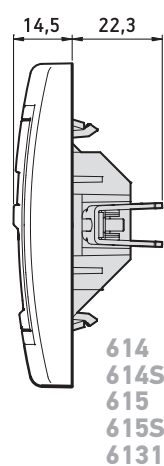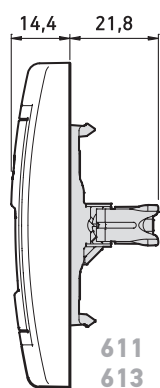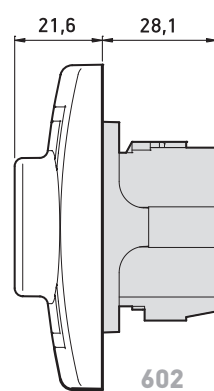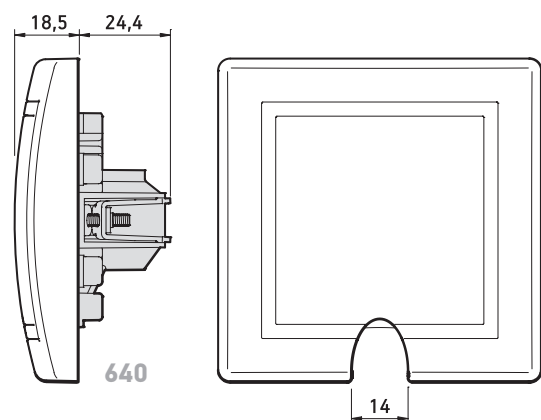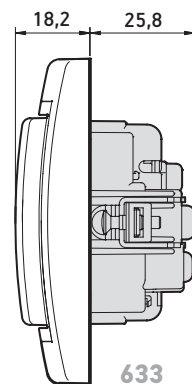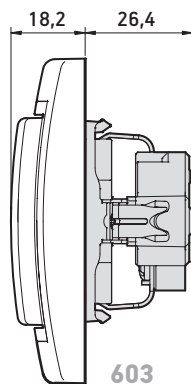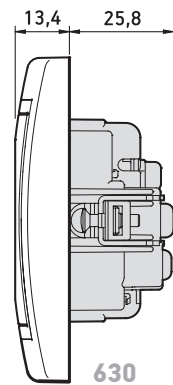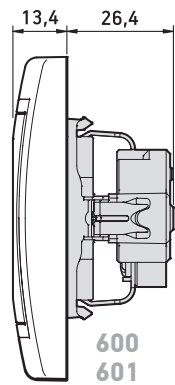

PRESTIGE

TEHNIČKI CRTEŽI TECHNICAL DRAWINGS

- Osnova maske 80 x 80 mm
- Cover frame base 80 x 80 mm

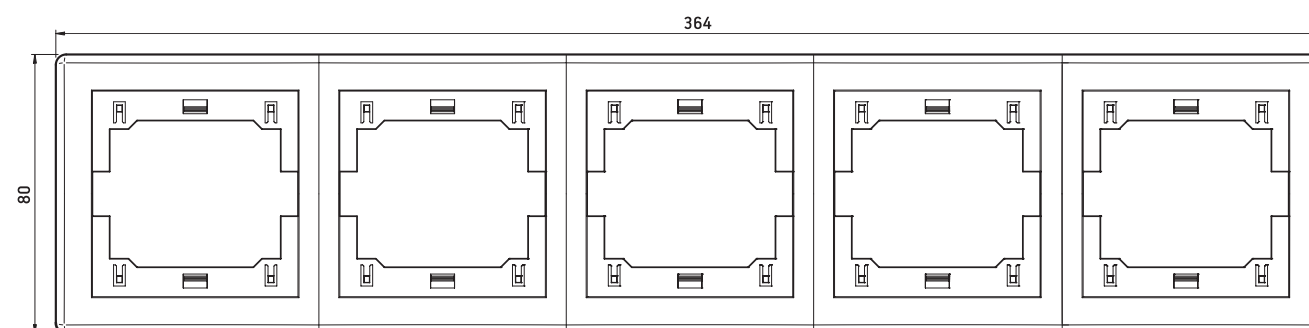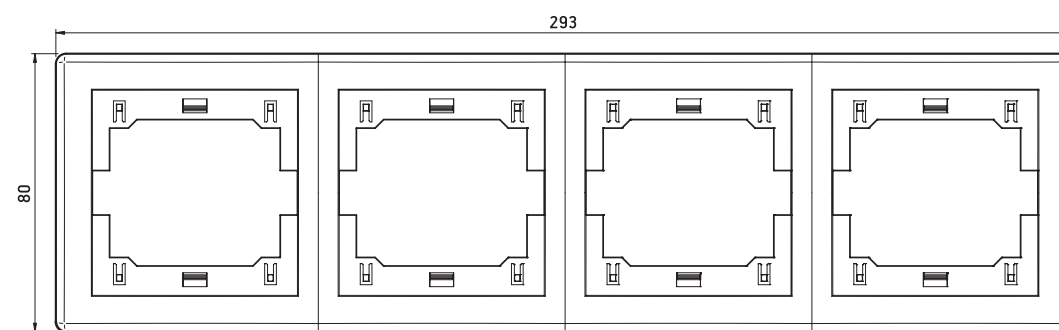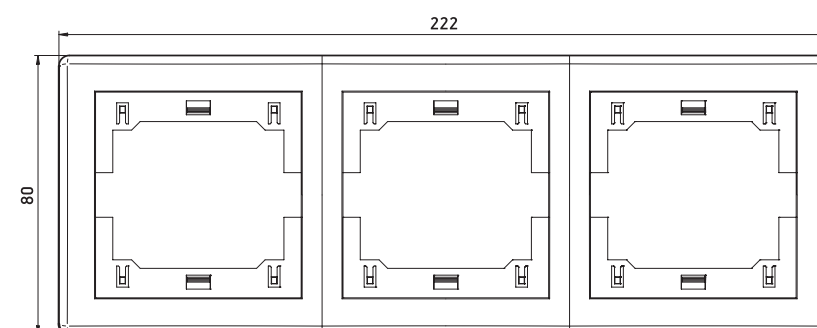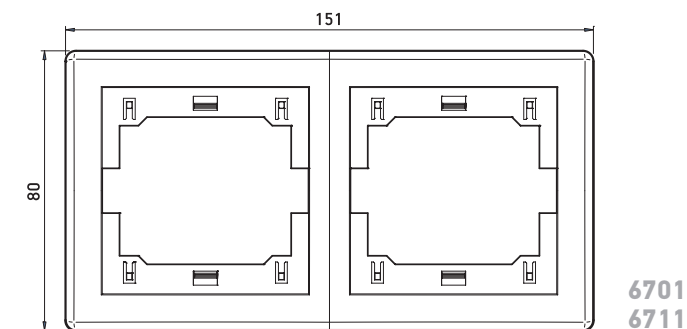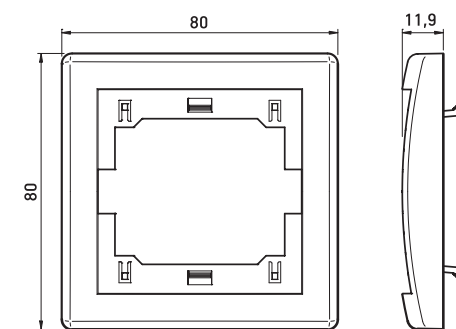


PRESTIGE

SADRŽAJ KATALOGA THE CATALOG CONTENT

- 6 TEHNIČKE PREDNOSTI
TECHNICAL ADVANTAGES
- 7 BOJE PREDNJIH ELEMENATA
FRONT ELEMENTS COLORS
- 8 STANDARDNE BOJE
STANDARD COLORS
- 10 SKLOPKE
SWITCHES
- 12 REGULATORI JAČINE SVETLOSTI
DIMMERS
- 13 PRIKLJUČNICE
SOCKET OUTLETS
- 15 KOMUNIKACIJE
COMMUNICATIONS
- 17 MEHANIZMI BEZ MASKE I MEĐURAMA
MECHANISMS WITHOUT COVER FRAME AND INTERFRAME
- 22 MASKE I MEĐURAMOVI
COVER FRAMES AND INTERFRAMES
- 24 ŠEME VEZIVANJA
WIRING DIAGRAMS
- 27 DIMENZIJE ZA UGRADNJU
INSTALLATION DIMENSIONS
- 29 TEHNIČKI CRTEŽI
TECHNICAL DRAWINGS

PRESTIGE



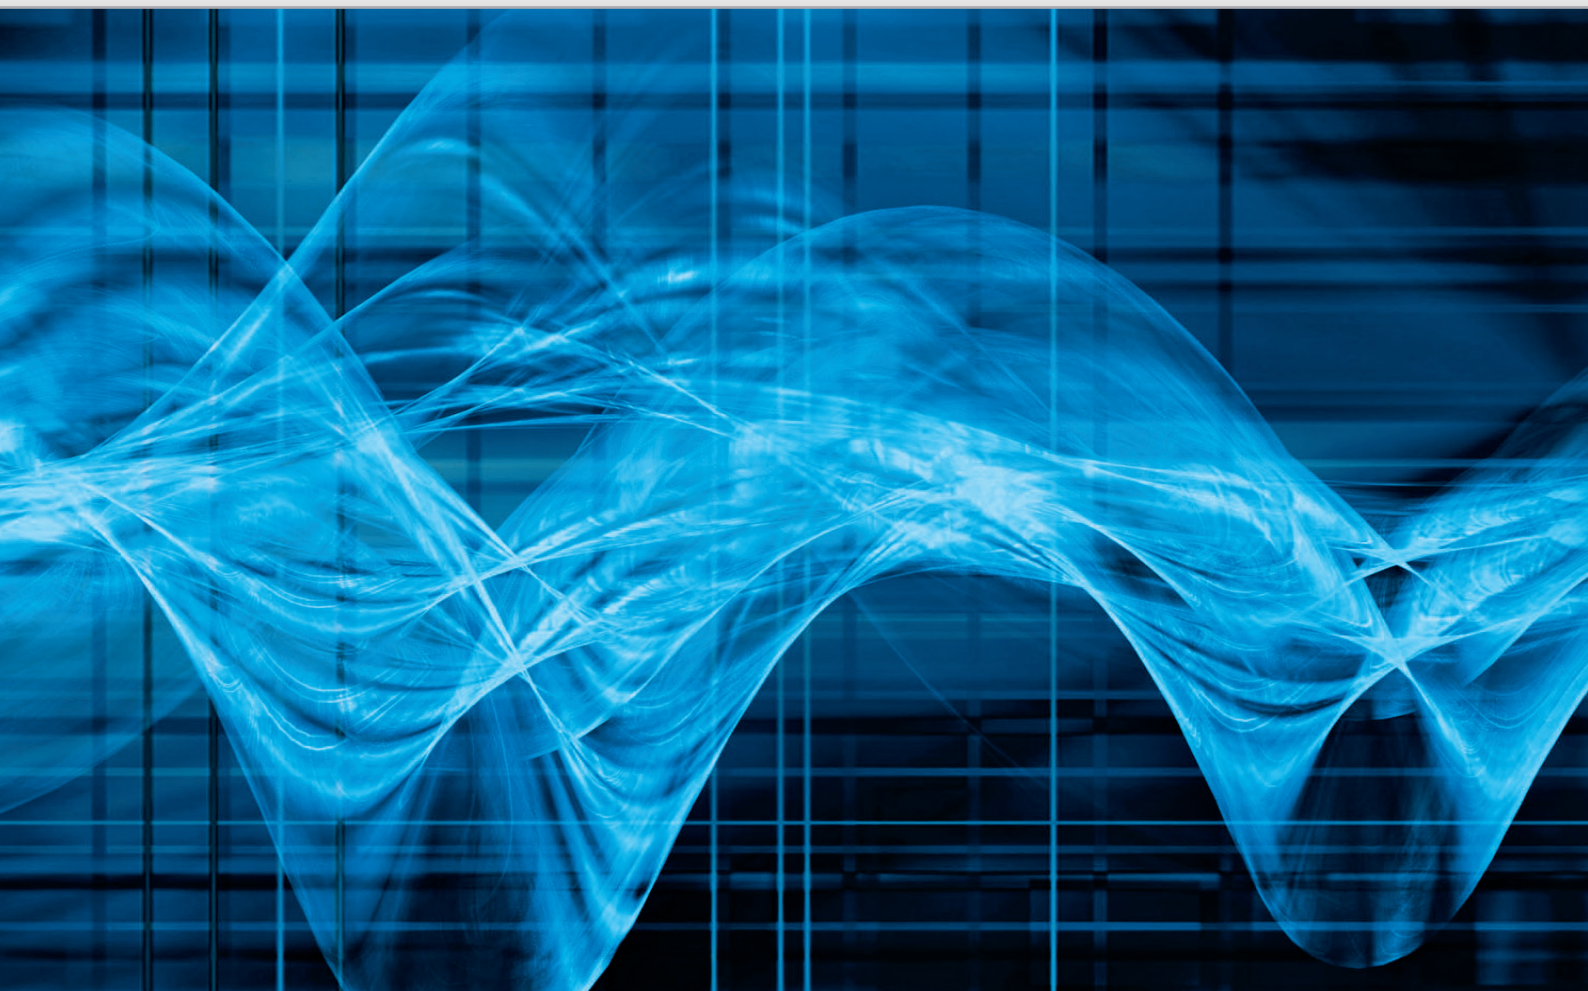

a: Železnička 10, 21432 Gajdobra, Serbia

t: +381 21 762 674, 762 586

f: +381 21 762 779

e: sales@aling-conel.com

www.aling-conel.com